


Square D NEMA Style Combination Motor Starters

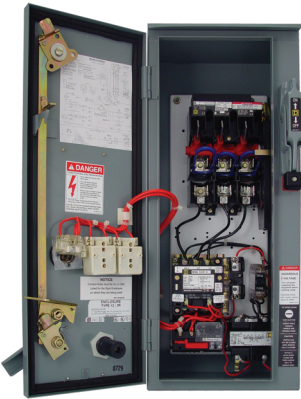

Customized product, competitively priced, and in stock now!

- Long-lasting, energy-efficient Red-ON and/or Green-OFF LED pilot lights
- Specially designed, pliable “foam-in-place” cabinet seals
- Available with Electronic Motor Circuit Protector (MCP) circuit breakers or fusible/non-fusible disconnect switch
- NEMA® Type 1, 12/3R enclosure
- HOA selector switch
- Up to two Normally Open (N.O.) and two Normally Closed (N.C.) aux contacts
- 120 V separate control voltage
- Separate control voltage interlock

Disconnect Switch Combination Starters

If your customer needs:						Pick from these starters:	
NEMA Size	Fuse Clip Size	Voltage (VAC)	Horsepower	Overload Relay	Current Range	Combination Starters	UPC/EAN
0 or 1	30 A	208 or 240	3 to 5	Melting Alloy	n/a	8538SCASP1	785901685043
1	60 A	208 or 240	5 to 7.5	Melting Alloy	n/a	8538SCASP2	785901863137
0 or 1	30 A	480 or 600	5 to 10	Melting Alloy	n/a	8538SCASP3	785901828457
1 or 2	60 A	208 or 240	7.5 to 10 (208) 7.5 to 15 (240)	Melting Alloy	n/a	8538SDASP1	785901692188
1 or 2	30 A	480 or 600	10 to 15	Melting Alloy	n/a	8538SDASP2	785901692461
2	60 A	480 or 600	15 to 25	Melting Alloy	n/a	8538SDASP3	785901915447
0 or 1	30 A	208 or 240	0.75 to 2	Motor Logic	3 - 9 FLA	8538SCASP4	785901169536
1	60 A	208 or 240	3 to 7.5	Motor Logic	9 - 27 FLA	8538SCASP5	785901656050
0 or 1	30 A	480 or 600	5 to 10	Motor Logic	6 - 18 FLA	8538SCASP6	785901875543
1 or 2	60 A	208 or 240	5 to 10 (208) 5 to 15 (240)	Motor Logic	15 - 45 FLA	8538SDASP4	785901876427
1 or 2	30 A	480 or 600	7.5 to 15	Motor Logic	9 - 27 FLA	8538SDASP5	785901908258
2	60 A	480 or 600	15 to 25	Motor Logic	15 - 45 FLA	8538SDASP6	785901908524

MCP Circuit Breaker Combination Starters*

If you need:						Pick from these starters:	
NEMA Size	Breaker Size	Voltage (VAC)	Horsepower	Overload Relay	Current Range	Combination Starters	UPC/EAN
1	30 A	240 or 480	0.25 to 7.5 (240) 0.25 to 10 (480)	Melting Alloy	n/a	8539SCASP3	785901910602
2	30 A	240 or 480	1.5 to 7.5 (240) 5 to 15 (480)	Melting Alloy	n/a	8539SDASP2	785901910749
2	50 A	240 or 480	7.5 to 10 (240) 15 to 25 (480)	Melting Alloy	n/a	8539SDASP3	785901955528
1	30 A	240 or 480	0.75 to 2 (240) 1.5 to 5 (480)	Motor Logic	3 - 9 FLA	8539SCASP6	785901955764
2	30 A	240 or 480	3 to 7.5 (240) 7.5 to 15 (480)	Motor Logic	9 - 27 FLA	8539SDASP5	785901973775
2	50 A	240 or 480	5 to 10 (240) 15 to 25 (480)	Motor Logic	15 - 45 FLA	8539SDASP6	785901973980

* Horsepower ratings also available at 208 and 600 VAC




Want to learn more?
Scan this QR code with
your smartphone for
an informative video
about Square D NEMA Combination
Motor Starters.



by Schneider Electric

NEMA Starters and Accessories

The Square D™ brand of NEMA® starters and accessories has been the preferred choice of electrical contractors for over half a century.

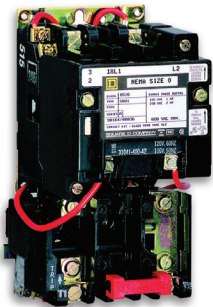

We stock a wide range of open-style NEMA starters and accessories, and can provide you with the necessary expertise to fulfill all your motor control needs from stock today!


Questions to ask:

1. Full Load Amps or HP?
2. Voltage and Phase?
3. Indoor or Outdoor?
4. Control Voltage – 120 V?
5. Confirm Overload Relay Style?
6. Accessories Required?

How to order:

1. Select Starter ex. 8536SAO2V02H30S
2. Select Accessories ex. 9991SCG8
3. Select Accessories ex. 9999SA3

For technical questions please contact the Schneider Electric Customer Care Center at 888-778-2733.

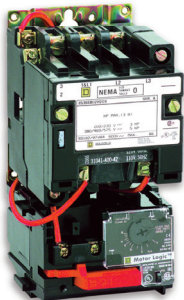

Starters*: Select Starter (Digest Page 16-18)

480 V	3 - 5 HP	7.5 - 10 HP	15 - 25 HP	30 - 50 HP
Style	Size 0 (FLA = 6-18)	Size 1 (FLA = 9-27)	Size 2 (FLA = 15-45)	Size 3 (FLA = 30-90)
Open	8536SBO2V02H30S	8536SCO3V02H30S	8536SDO1V02H30S	8536SEO1V02H30S
NEMA 1	8536SBG2V02H30S	8536SCG3V02H30S	8536SDG1V02H30S	8536SEG1V02H30S
NEMA 3R	8536SBA2V02H30S	8536SCA3V02H30S	8536SDA1V02H30S	8536SEA1V02H30S





* All starters above are rated at 480v/Solid State O.L. Relays/120v Separate Control. To order starter with standard thermal overload relay, remove "H30." See digest page 16-116 for Thermal Unit Selection.



Want to learn more? Scan this QR code with your smartphone for an informative video about the NEMA starters and accessories from Schneider Electric.



by Schneider Electric

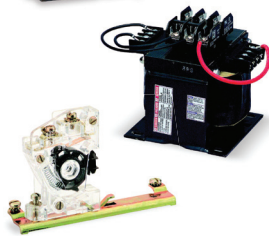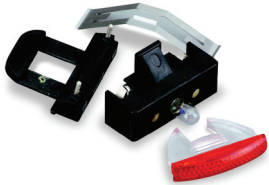

1 Option #1: Separate Enclosure (Digest Pages 16-92/93)

Style	Size 0	Size 1	Size 2	Size 3
NEMA 1	9991SCG8	9991SCG8	9991SDG8	9991SEG8
NEMA 3R/12	9991SCA11	9991SCA11	9991SDA11	9991SEA11

2 Option #2: Push-Button Kits (Digest Page 16-109)

Style	Size 0	Size 1	Size 2	Size 3
Start/Stop NEMA 1	9999SA2	9999SA2	9999SA2	9999SA2
S/S NEMA 3R/12	9999SA3	9999SA3	9999SA3	9999SA3
On/Off NEMA 1	9999SA10	9999SA10	9999SA10	9999SA10
On/Off NEMA 3R/12	9999SA3	9999SA3	9999SA3	9999SA3

3 Option #3: Selector Switches (Digest Page 16-109)

Style	Size 0	Size 1	Size 2	Size 3
HOA NEMA 1	9999SC2	9999SC2	9999SC2	9999SC2
HOA NEMA 3R/12	9999SC8	9999SC8	9999SC8	9999SC8
On/Off NEMA 3R/12	9999SC22	9999SC22	9999SC22	9999SC22

4 Option #4: Pilot Light Kits (Digest Page 16-109)

Style	Size 0	Size 1	Size 2	Size 3
NEMA 1	9999SP2R	9999SP2R	9999SP2R	9999SP2R
NEMA 3R/12	9999SP28R	9999SP28R	9999SP28R	9999SP28R

5 Option #5: Replacement Coils (Digest Page 16-105)

Style	Size 0	Size 1	Size 2	Size 3
24 VAC	31041-400-20	31041-400-20	31063-409-16	31074-400-16
120 VAC	31041-400-42	31041-400-42	31063-409-38	31074-400-38
208 VAC	31041-400-48	31041-400-48	31063-409-44	31074-400-44
240 VAC	31041-400-51	31041-400-51	31063-409-47	31074-400-47
480 VAC	31041-400-60	31041-400-60	31063-409-57	31074-400-57

6 Option #6: Misc Accessories/Parts (Digest Pages 16-83, 14-14, 16-107)

Style	Size 0 (FLA = 6-18)	Size 1 (FLA = 9-27)	Size 2 (FLA = 15-45)	Size 3 (FLA = 30-90)
O.L. Relays	9065SF020	9065SF120	9065ST220	9065ST320

Ctrl Power Xfmr	9070TF50D1	9070TF100D1	9070TF150D1	9070TF200D1
-----------------	------------	-------------	-------------	-------------

Aux Contacts	1-Normally Closed	1-NO/NC
	9999SX7	9999SX8

Schneider Electric USA

1415 S. Roselle Road
 Palatine, IL 60067
 Tel: 847-397-2600
 Fax: 847-925-7500
 www.schneider-electric.com