

Romex® Control & Signal Cable

Nonmetallic-Sheathed Cable with both Power Conductors and Control/Signal Conductors. 600 Volts. Copper Conductors. Color-Coded Jacket. SIMpull® Jacket Designed for Easier Pulling.

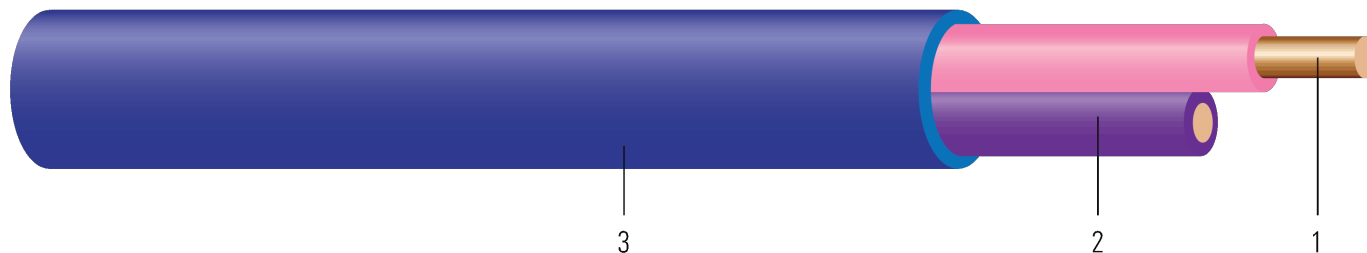


Image not to scale. See Table 1 for dimensions.

CONSTRUCTION:

- Conductor:** Solid copper per ASTM B3.
- Insulation:** All phases are insulated with Polyvinyl Chloride
- Jacket:** Polyvinyl Chloride PVC jacket utilizing SIMpull® Technology. Colored light Blue

APPLICATIONS AND FEATURES:

ROMEX® SIMpull® Low-Voltage Control & Signal Cable is a class 2 power-limited circuit cable for use in lighting control and dimming applications. Temperature range is -20°C to +60°C. Sunlight Resistant

SPECIFICATIONS:

- ASTM B3 Soft or Annealed Copper Wire
- UL 719 Nonmetallic-Sheathed Cables
- UL 2556 Standard for Safety Wire and Cable Test Methods

SAMPLE PRINT LEGEND:

E18679 (UL) ROMEX® SIMpull{TM} XX AWG CU X CDR WITH XX AWG GROUND TYPE NM-B-PCS 600 VOLTS - PATENT PENDING

Secondary Print: CONDUCTORS UNDER THIS JACKET ARE ONLY FOR SIGNAL/CONTROL CONNECTIONS, NOT FOR CIRCUIT POWER
POWER CONDUCTORS UNDER THIS JACKET ARE ONLY FOR SIGNAL/CONTROL CONNECTIONS, NOT FOR CIRCUIT POWER

Table 1 – Weights and Measurements

| Stock Number | Cond. Size | Conductor Number | Diameter Over Conductor | Conductor Stranding | Insulation Thickness | Approx. OD | Copper Weight | Overall Weight |
|--------------|---------------|------------------|-------------------------|---------------------|----------------------|------------------|---------------|----------------|
| | AWG/ Kcmil | | inch | | mils | inch | lbs/1000ft | lbs/1000ft |
| 643505 | 16 | 2 | 0.050 | Solid | 6 | 0.106 x 0.186 | 16 | 22 |

All dimensions are nominal and subject to normal manufacturing tolerances

◊ Cable marked with this symbol is a standard stock item



Southwire Company, LLC | One Southwire Drive, Carrollton, GA 30119 | www.southwire.com

Copyright © 2024 Southwire Company, LLC. All Rights Reserved



Southwire

**CABLETECH
SUPPORT™**

Services

UPDATED: Dec. 11, 2023, 9:29 p.m. UTC REVISION: 1.000.001

Table 2 – Electrical and Engineering Data

| Cond. Size | Conductor Number | Min. Bend Radius | DC Resistance at 25°C | AC Resistance at 75°C | Allowable Ampacity Raceway 60°C | Allowable Ampacity Raceway 75°C | Allowable Ampacity Raceway 90°C |
|------------|------------------|------------------|------------------------|------------------------|---------------------------------|---------------------------------|---------------------------------|
| AWG/Kcmil | | Inches | $\Omega/1000\text{ft}$ | $\Omega/1000\text{ft}$ | Amp | Amp | Amp |
| 16 | 2 | 0.75 | 4.487 | 5.406 | - | - | 18 |

* Ampacities based upon 2023 NEC Table 310.16 and do not take into account the overcurrent protection limitations in NEC 240.4(D) of 15 Amps for 14 AWG CU, 20 Amps for 12 AWG CU, and 30 Amps for 10 AWG CU (independent of the conductor temperature rating and stranding if size is present in table). Also, see NEC sections 310.15 and 110.14(C) for additional requirements.

