

6.5 CREEDMOOR 147 gr. ELD® MATCH TAP PRECISION®




ITEM NO. 81505

Performance Characteristics:

- Match accuracy
- Minimal deflection on glass
- Large wound cavities
- Meets FBI barrier penetration protocol
- High Retained Weight
- MADE In THE USA
- Net Explosive Weight (approx. per box): 0.1274 lbs

CASE: 6.5 CREEDMOOR

- Manufacturer's name (Hornady) and caliber designation (6.5 CREEDMOOR) imprinted on case head
- **Characteristics:** Match grade annealed brass alloy



BULLET: ELD® MATCH

- **Ballistic Coefficient:** .697
- **Sectional Density:** .301
- **Bullet Length:** 1.435"
- **Recommended Rifling Twist Rate:** 1:7 to 1:8"
- **Characteristics:** Polymer tipped, Match grade
- **Push/Pull:** 70/70



POWDER & PRIMER

- **Powder:** Temperature stable with flash suppressant
- **Primer:** Large rifle, staked primer pocket



LOT NUMBERS

- Lot numbers on each box and case

BALLISTIC DATA

	Muzzle	100 yds	200 yds	300 yds	400 yds	500 yds
Velocity (fps)	2655	2528	2404	2284	2167	2054
Energy (ft lbs)	2300	2085	1886	1703	1533	1377
Trajectory (in)	-1.5	0	-3.9	-13.9	-30.5	-54.6

PACKAGING



- Tray: Item No. 8408

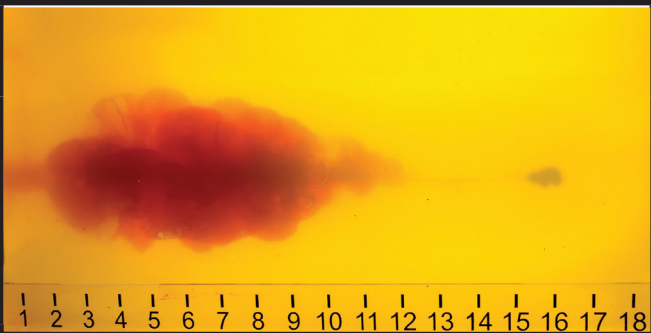

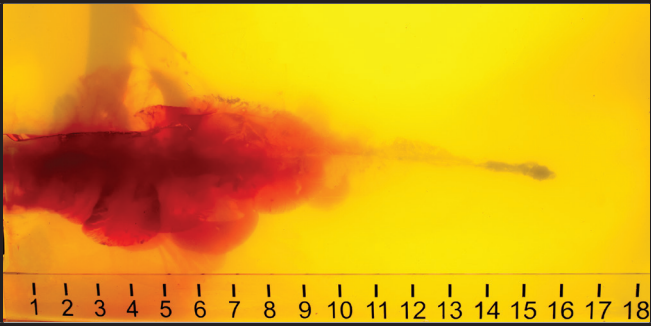
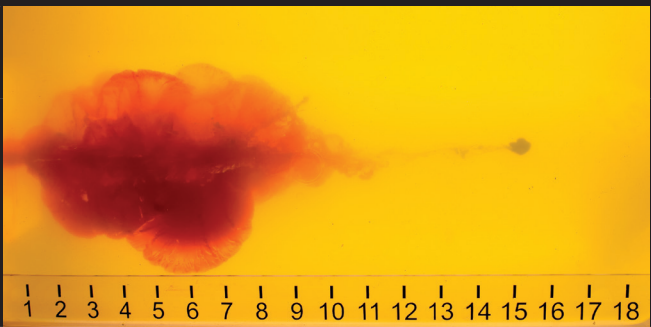
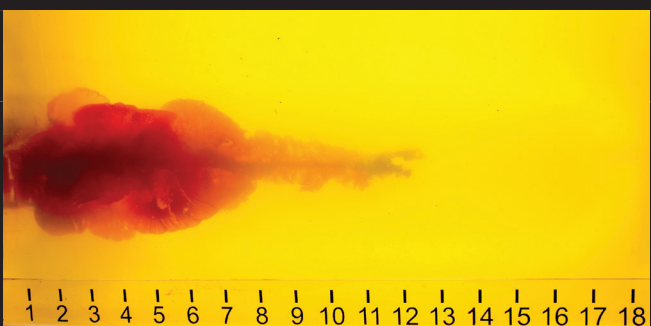


- Box Weight: 1.00 lbs
- Gross Weight: 1.07 lbs
- 20 rounds per box with plastic tray



- Carton: Item No. 84511
- Carton Weight: 10.7 lbs
- Carton Dimensions: 5.875" x 6.437" x 8.0"
- 10 boxes per carton | 200 rounds per carton

6.5 CREEDMOOR
147 gr. ELD® MATCH TAP PRECISION®
24" BBL | 1:8" Twist | REMINGTON 700
ITEM NO. 81505

	Total Penetration	Max Cavity	Depth to Max Cavity	Initial Penetration	Retained Weight	Retained Weight %	Expanded Diameter	Velocity (fps)	
	16.0"	5.5"	2.5"	1.0"	68.4 gr.	47%	0.61"	2646	BARE GELATIN
	14.5"	6.5"	4.5"	0.0"	75.9 gr.	52%	0.63"	2657	STEEL
	15.5"	6.0"	3.0"	0.0"	77.5 gr.	53%	0.76"	2664	WALLBOARD
	15.5"	6.0"	5.5"	0.0"	80.3 gr.	55%	0.65"	2676	PLYWOOD
	12.5"	4.75"	2.0"	0.0"	51.6 gr.	35%	0.64"	2633	AUTO GLASS

6.5 CREEDMOOR

147 gr. ELD[®] MATCH TAP PRECISION[®]



Item #81505						
24" Thompson Center Icon Custom 1:7"	Muzzle	100 yds	200 yds	300 yds	400 yds	500 yds
Velocity (fps)	2670	2542	2418	2298	2181	2067
Energy (ft lbs)	2327	2110	1909	1723	1552	1394
Trajectory (inches)	-1.5	0.0	-3.9	-13.7	-30.2	-53.9
24" Remington 700 Custom Proof Carbon Fiber 1:8"	Muzzle	100 yds	200 yds	300 yds	400 yds	500 yds
Velocity (fps)	2796	2665	2537	2414	2293	2176
Energy (ft lbs)	2551	2317	2101	1901	1716	1545
Trajectory (inches)	-1.5	0.0	-3.4	-12.2	-27.0	-48.4
24" Remington[®] 700 Custom 1:8"	Muzzle	100 yds	200 yds	300 yds	400 yds	500 yds
Velocity (fps)	2693	2565	2440	2319	2201	2087
Energy (ft lbs)	2367	2147	1943	1755	1581	1421
Trajectory (inches)	-1.5	0.0	-3.8	-13.4	-29.5	-52.8
24" Ruger Precision Rifle 1:8"	Muzzle	100 yds	200 yds	300 yds	400 yds	500 yds
Velocity (fps)	2685	2557	2433	2313	2195	2081
Energy (ft lbs)	2353	2134	1932	1746	1573	1414
Trajectory (inches)	-1.5	0.0	-3.8	-13.5	-29.8	-53.2
*24" SAAMI Test Barrel 1:8"	Muzzle	100 yds	200 yds	300 yds	400 yds	500 yds
Velocity (fps)	2655	2528	2404	2284	2167	2054
Energy (ft lbs)	2300	2085	1886	1703	1533	1377
Trajectory (inches)	-1.5	0.0	-3.8	-13.9	-30.5	-54.6

*Test data used on packaging label