



# 6.5 Creedmoor with 90 gr TNT® HP



<b>Max Case Length:</b>	1.920"
<b>Trim-to Length:</b>	1.910"
<b>Max Cart. OAL:</b>	2.825"
<b>RCBS Shell Holder:</b>	# 3
<b>Test Firearm:</b>	Universal Receiver
<b>Barrel Length:</b>	24"

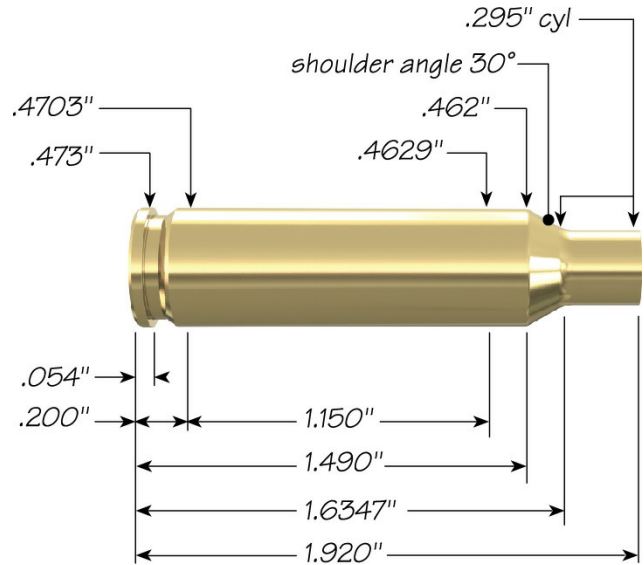

6.5mm	Speer Part No.	Weight, grains	COAL Tested	Ballistic Coefficient	Sectional Density
 <b>90 gr TNT® HP</b>	1445	90	2.700"	.281	.184

Propellant	Cartridge Case	Primer	START CHARGE		MAXIMUM CHARGE	
			Grain	Velocity (ft/sec)	Grain	Velocity (ft/sec)
Accurate 2700	Hornady	CCI 200	45.0	3087	<b>50.0</b>	3490
Alliant AR-Comp	Hornady	CCI 200	38.5	3027	<b>42.8</b>	3389
Alliant Power Pro 2000-MR	Hornady	CCI 200	44.7	3120	<b>49.7</b>	3506
Alliant Power Pro Varmint	Hornady	CCI 200	41.0	3105	<b>45.5</b>	3449
Alliant Reloder 15	Hornady	CCI 200	41.7	3107	<b>46.3</b>	3444
Alliant Reloder 17	Hornady	CCI 200	45.3	3128	<b>50.0 C</b>	3499
Hodgdon H380	Hornady	CCI 200	45.1	3108	<b>49.0 C</b>	3381
Hodgdon H414	Hornady	CCI 200	45.0	3070	<b>50.0</b>	3460

Hodgdon Varget	Hornady	CCI200	40.4	3088	<b>44.9</b>	3430
IMR 4064	Hornady	CCI200	40.0	3095	<b>44.4</b>	3444
Vihtavuori N140	Hornady	CCI200	39.9	3016	<b>44.3</b>	3359

C = Compressed Load

[speer-ammo.com](http://speer-ammo.com)