



AREA RUG & CARPET CLEANING MACHINES




From Design to Production

www.cleanvac.com



BRS COMBI SERIES

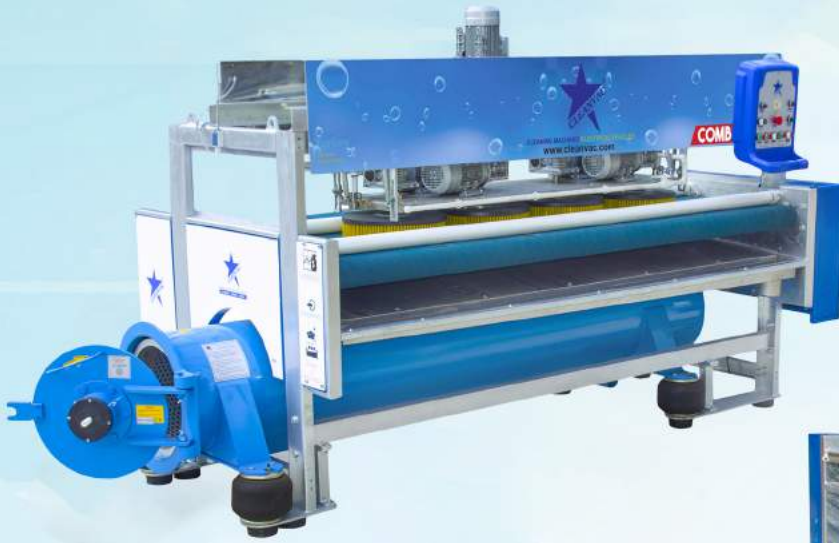

Green
Technology
inside



- ✓ 2 jobs in 1 machine
- ✓ 260cm - 320cm - 420 cm
- ✓ various functions on control panel
- ✓ monophase & threephase option
- ✓ optional features



	COMBI B - 260	COMBI B - 320	COMBI B - 420
Total Power (kW)	15	15	16,1
Maks. Ampere (A)	30,27	30,27	33,27
Voltage (V-Hz)	380V - 50Hz	380V - 50Hz	380V - 50Hz
Number of Disc Brushes	4	4	5
Maks. Carpet Width	260 cm	320 cm	420 cm
Speed of Conveyor Band	0 - 7 m/min	0 - 7 m/min	0 - 7 m/min
Brush Speed(rpm)	140 d/dk	140 d/dk	140 d/dk
Material	Stainless Steel	Stainless Steel	Stainless Steel
Squeegee and Vacuum Function (OPTIONAL)			
Water Consumption	24 - 60 L/m ²	25 - 50 L/m ²	26 - 40 L/m ²
Washing Capacity	85 - 112 m ² /sa	110 - 141 m ² /sa	140 - 165 m ² /sa
Motor Speed	1.400 rpm	1.400 rpm	1.400 rpm
Inner Drum Speed	1.200 rpm	1.200 rpm	1.200 rpm
Length of Inner Drum	270 cm	320 cm	420 cm
Diameter of Inner Drum	38 cm	40 cm	40 cm
Material of Drum	Stainless Steel	Stainless Steel	Stainless Steel



BRS C Compact & BRS F Full Automatic Carpet Washing Machine



BRS F SERIES



BRS C SERIES

Option Table 

Options	Squeegee	Rinsing	Vacuum	Pressured Water	Fiber Body
BRS-C / F	✓	✓	Optional	Optional / ✓	Optional

AUTOMATIC CARPET WASHER

TYPE	BRS 260 F	BRS 320 F	BRS 420 F	BRS 260 C	BRS 320 C	BRS 420 C
Electrical Specifications						
Total Power	12,3 kW	12,3 kW	14,5 kW	8 kW	8 kW	9 kW
Voltage	3 ~ 380V	3 ~ 380V	3 ~ 380V	3 ~ 380V	3 ~ 380V	3 ~ 380V
Frequency	60Hz	60Hz	60Hz	60Hz	60Hz	60Hz
Mechanical Specifications						
Size	290x203x205 (cm)	360x225x205 (cm)	450x225x205 (cm)	315x225x205 (cm)	380x225x205 (cm)	480x225x205 (cm)
Number of Disc Brushes	8	8	10	4	4	5
Number of Roll Brushes	2	2	2	1	1	1
Maximum Carpet Width	260 cm	320 cm	420 cm	260 cm	320 cm	420 cm
Conveyor Speed	0 - 7 (m/min)	0 - 7 (m/min)	0 - 7 (m/min)	0 - 7 (m/min)	0 - 7 (m/min)	0 - 7 (m/min)
Brush Speed	140 (rpm)	140 (rpm)	140 (rpm)	140 (rpm)	140 (rpm)	140 (rpm)
Material Body	Stainless Chrome	Stainless Chrome	Stainless Chrome	Stainless Chrome	Stainless Chrome	Stainless Chrome
Material of Body Cover	Fiber	Fiber	Fiber	Fiber	Fiber	Fiber
Cleaning Specifications						
Water Consumption	53 - 70 L/m ²	42 - 54 L/m ²	37 - 43 L/m ²	26 - 50 L/m ²	26 - 50 L/m ²	26 - 50 L/m ²
Cleaning Capacity	85 - 112 m ² /h	110 - 141 m ² /h	140 - 165 m ² /h	85 - 112 m ² /h	110 - 141 m ² /h	140 - 165 m ² /h
Squeegee	✓	✓	✓	✓	✓	✓
Other Specifications						
	Touchscreen Control			Vacuum - optional -		
	Carpet Rolling at the End			Rinsing		

- New Stainless Fiber Body
- BRS table type models are now very compact and modern looking
- Detergent, shampoo and water quantities adjusted through PLC control panel.
- Successful cleaning results with 4-6 disc brushes and 1 cylindrical brush
- In different sizes ; 210cm, 260cm, 320cm, 420cm



BRS-B BASIC

- The most affordable table type Carpet washing machine
- 4 disc brushes
- Basic features
- Simple to use and maintain
- From 210cm to 420cm width



Option Table



BRS260-B	SQUEEGEE	RINSING	ROLLING BRUSH
	<i>Optional</i>	✓	<i>Optional</i>

Basic Type Automatic Carpet Washer			
Electrical Specifications			
	BRS 260 B	BRS 320 B	BRS 420 B
Total Power	6 kW	6 kW	7 kW
Voltage	3~ 380V	3~ 380V	3~ 380V
Frequency	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz
Mechanical Specifications			
Size	315x200x205 (cm)	380x200x205 (cm)	480x200x205(cm)
Number of Disc Brushes	4	4	5
Maximum Carpet Width	260cm	320cm	420cm
Conveyor Speed	0-7 (m/min)	0-7 (m/min)	0-7 (m/min)
Brush Speed	140 (rpm)	140 (rpm)	140 (rpm)
Material of Body	(stainless chrome)	(stainless chrome)	(stainless chrome)
Material of Body Cover	Fiber	Fiber	Fiber
Cleaning Specifications			
Water Consumption	26-50 L/m2	26-50 L/m2	26-50 L/m2
Cleaning Capacity	55-80 m2/min	85-112 m2/min	120-134 m2/min

BRS Railed Type Automatic Carpet Washing Machine



- Saves up to 80% on chemicals, water, detergent and labor
- With the computer controlled system gets each square meter of carpets brushed equally.
- BRS carpet cleaning machine has the feature of rotating brushes in different directions.
- The BRS washing machine, dual staged pre- washing or rinsing could be done preferably.
- Can be installed on up to 7-10 meter rail. In different sizes ; 260cm, 320cm, 420cm

Type	Automatic Rail Type Carpet Washer		
	BRS 260	BRS 320	BRS 420
Electrical Specifications			
Total Power	7kW	8 kW	11kW
Voltage	3~ 380V	3~ 380V	3~ 380V
Frequency	60Hz	60Hz	60Hz
Mechanical Specifications			
Size	325x85x96 (cm)	450x100x125 (cm)	510x110x115 (cm)
Number of Disc Brushes	3	4	5
Motor to Brush Leveraging	(w/ reducer)	(w/ reducer)	(w/ reducer)
Maximum Carpet Width	260cm	320cm	420cm
Rail Length	7.5 m	7.5 m	10 m
Conveyor Speed	0-11 (m/min)	0-11 (m/min)	0-11 (m/min)
Brush Speed	140 (rpm)	140 (rpm)	140 (rpm)
Material	stainless galvanized	stainless galvanized	stainless galvanized
Cleaning Specifications			
Water Consumption	26 - 50 L/m ²	26 - 50 L/m ²	26 - 50 L/m ²
Cleaning Capacity	60-92 m ² /min	85-127 m ² /min	130-175 m ² /min
Others			
	Touchscreen Control Controlled by Sensors		Vacuum -Optional- Rinsing



- Reduces drying time
- Dries between 200m² - 250m² carpet in 9 hours.
- Very ideal machine for isolated drying rooms
- Working temperature is 40° Celcius

Carpet De-Humidifier

Type	(Dryer machine)
	DRY60
Electrical specifications	
Power	2.25 kW
Voltage	3~ 380V
Drying specifications	
Heating capacity	13 500 kcal/h
Air flow	1000 m ³ /h
Fan rpm	1400 d/d (rpm)
Heating capacity	Can make dry 200-250m ² carpet in room which is 60m ³ in 9 hours
Mechanical specification	
Dimension	90x70x154 (cm)



CLEANVAC CARPET



DRYING



WASHING



03

02

01

CLEANING PROCESS

05



FINISHING/PACKING

04



WRINGING



DUSTING



MADE IN TURKEY

RL 1200 - RL 1400 - RL1600 Carpet Wringing Centrifuge



- Carpets dry up to %95 just in 2-3 mins.
- It runs quietly and smoothly.
- First class stainless material drum



- Rinsing System
- Signs of folding does not occur & colors do not mix
- In different sizes ; 270cm, 320cm, 370cm, 420cm

Type	Carpet Wringer Centrifuge								
	RL 1200				RL 1400			RL 1600	
	220	270	320	410	270	320	420	320	420
Electrical Specifications									
Total power	5.5 kW				5.5 kW	5.5 kW	7.5 kW	7.5 kW	11 kW
Voltage	3~ 380V				3~ 380V	3~ 380V	3~ 380V	3~ 380V	
Frequency	50Hz-60Hz				50Hz-60Hz	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz	
Motor type	3~ Asynchronous				3~ Asynchronous	3~ Asynchronous	3~ Asynchronous	3~ Asynchronous	
Mechanical specifications									
Motor speed	1400 rpm				1400 rpm	1400 rpm	1400 rpm	1400 rpm	
Drum speed	1200 rpm				1200 rpm	1200 rpm	1200 rpm	1200 rpm	
Inner drum length	220-410 (cm)				270 (cm)	320 (cm)	420 (cm)	320 (cm)	420 (cm)
Inner drum diameter	28 (cm)				38 (cm)	38 (cm)	38 (cm)	48 (cm)	
Inner drum material	Stainless Chrome				Stainless Chrome	Stainless Chrome	Stainless Chrome	Stainless Chrome	
Max carpet width	2 m	2.5 m	3 m	4 m	2.5 m	3 m	4 m	3 m	4 m
Drying time	1-6 min				1-6 min	1-6 min	1-6 min	1-6 min	
Dimensions					117x390x113	115x390x120	120x460x145	122x390x145	122x460x145
Other specifications									
** Transmission is an option.									

SC 43 / SC 43D / SC 50 Manual Carpet Washing Machine

- Durable and aesthetic body.
- High quality and maneuverable.
- With 2 different types of brush

and pad holder

- Easy to operate and maintain.




	SC42	SC43	SC43D	SC50
ORDER CODE :	152SC42	152SC43	152SC43D	152SC50
Electrical Specifications				
Power	1.1 kW	1.1 kW	2.2 kW	1.5 kW
Voltage	220 V	220 V	220 V	380 V
Fuse Rate	10A	10A	20A	20A
Brush rpm	170	170	170	170
Cleaning Specifications				
Working Width	42 (cm)	43 (cm)	90 (cm)	50 (cm)
Brush	42 (cm)	43 (cm)	43 (cm)	50 (cm)
Tank Capacity	12 L	12 L	12 L	-
Mechanical Specifications				
Dimensions	45x60x120 (cm)	45x60x120 (cm)	80x60x120 (cm)	55x65x125 (cm)
Weight	30 (kg)	40 (kg)	80 (kg)	50 (kg)

Carpet Carrying Machine

LIFT-500

- Battery Powered Lifting Carrying of Carpets.
- High Maneuverability
- 500 Kg Lifting and Carrying Capacity
- Lifting up to 150cm

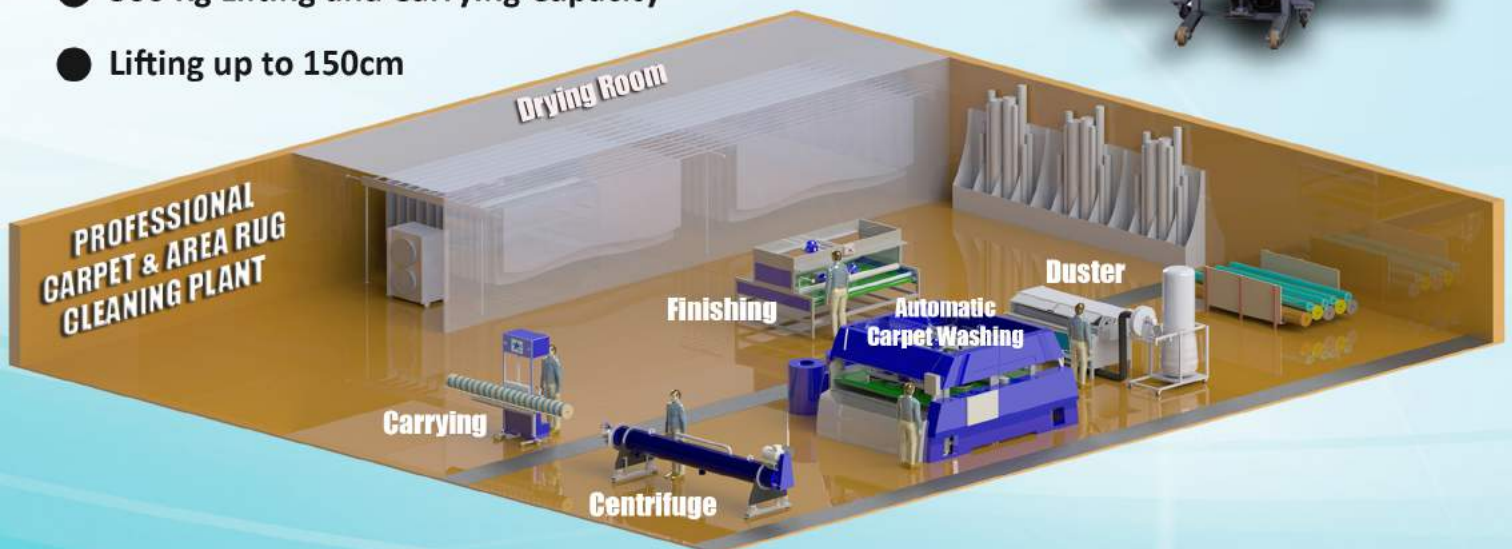



- Dusting rugs before washing makes cleaning quality much better.
- Beats and vacuums carpets effectively
- Capable of dusting 300m² – 500m² carpets in a day
- Easy to operate and maintain.


HTM

Type	Automatic Duster			Manual duster
	HTM 260	HTM 320	HTM 420	MD60
Electrical Specifications				
Total Power	4.05 kW	4.05 kW	5.25 kW	1.1 kW
Band Motor	0.75 kW	0.75 kW	0.75 kW	-
Vacuum Motor	2.2* kW	2.2* kW	3* kW	-
Duster	1.1 kW	1.1 kW	1.5 kW	1.1 kW
Voltage	380V	380V	380V	380 V
Frequency	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz	50-60 Hz
Mechanical Specifications				
Size	110x250x100 (cm)	110x350x100 (cm)	110x450x100 (cm)	58x36x124 (cm)
Band Width	260 (cm)	320 (cm)	420 (cm)	60 (cm)
Band Length	100 (cm)	100 (cm)	100 (cm)	30 (cm)
Conveyor Speed	1* m/min	1* m/min	1* m/min	Manual
Hitter Speed	140 (rpm)	140 (rpm)	140 (rpm)	140 (rpm)
Material	stainless chrome	stainless chrome	stainless chrome	stainless chrome
Cleaning				
Max. Carpet Width	260 cm	320 cm	420 cm	Manual
Vacuuming Capacity	2800 L/min	2800 L/min	3600 L/min	-
Vacuum Bag Capacity	80* L	80* L	80* L	-
Cleaning Capacity	156 m ² /h	192 m ² /h	252 m ² /h	Manual
Others				
(security system with switch)				
*-optional-				

- Very Economic & Useful
- Ideal Solution for beginners in Carpet cleaning
- Easy to operate and maintain

Manual Duster

MD 60

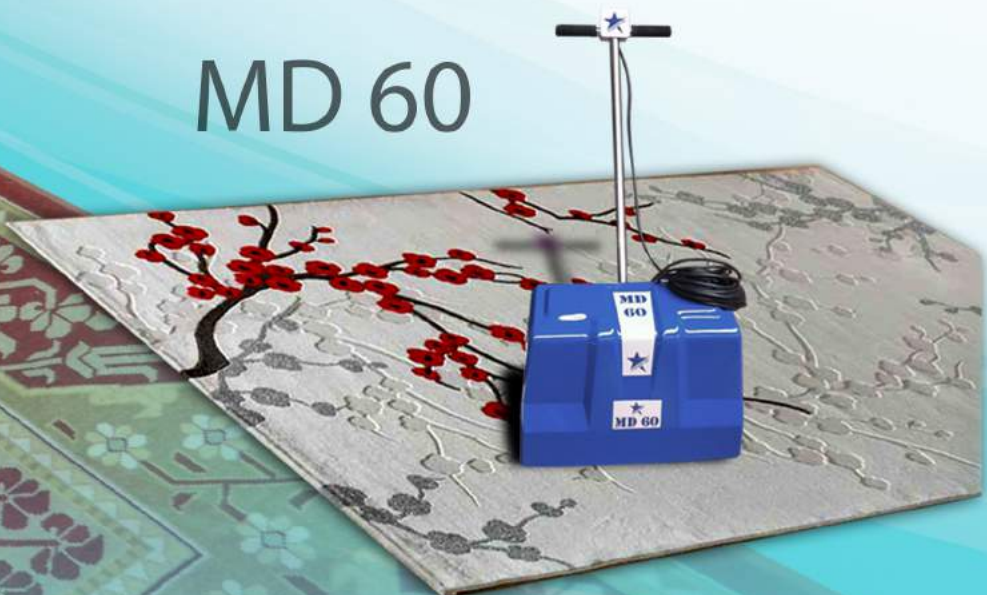

HM Carpet Packing & Finishing Machine

- Sizes from 210cm width to 420cm width available
- Easy Control of functions from control panel
- Removes hair and dust before packing effectively
- Automatically turns carpets into roll form for packing



Type	HM Carpet Packing & Finishing Machine		
	HM 210	HM 320	HM 420
Electrical Specifications			
Total Power	2 kW	2 kW	3 kW
Band Motor	0.75 kW	0.75 kW	1.1 kW
Brush Motor	1.1 kW	1.1 kW	1.5 kW
Voltage	3~ 380V	3~380V	3~380V
Frequency	60Hz	60Hz	60Hz
Mechanical Specifications			
Size	110x240x150 (cm)	110x350x150 (cm)	110x450x150 (cm)
Band Width	200 (cm)	300 (cm)	400 (cm)
Band Length	100 (cm)	3800 (cm)	100 (cm)
Conveyor Speed	0-5* m/min	0-5* m/min	0-5* m/min
Brush rpm	140 rpm	140 rpm	140 rpm
Cleaning			
Maximum Carpet Width	260 cm	320 cm	420 cm
Cleaning Capacity	120-156 m2/h	140-192 m2/h	182-252 m2/h
Others			
*-adjustable-			

ISV 2800-S Steam Cleaner

- 2800-S produces up to 150-170 degrees of steam from its steam generator.
- Steam helps dissolve dirt in a short period of time and no wetness stays on surfaces.
- With its hot water feature tough stains and heavy dirt are removed from the surface of the carpet and seats.
- Dirty water can also be vacuumed with a high suction power generated by 2 pieces of industrial type of interconnected engines.

ISV 2800-S



ISV 2800 S and 90 - C COMPACT STEAM & HOT WATER CLEANER

Type	ISV 2800 S	90 - C COMPACT
Electrical Specifications		
Total Power	5,6 kW	4,5 kW
Vacuum Motor	1200 W	1200 W
Resistance	3200 W	3000 W
Frequency	60Hz	60Hz
Voltage	220V	220V
Mechanical Specifications		
Dimension	55x60x114 (cm)	
Weight	40 kg	25 kg
Clean Water Tank Capacity	35 L	7 L
Dirty Water Tank Capacity	20 L	5 L
Cleaning Specifications		
Steam Pressure	6 Bar	4 Bar
Max. Heat	160° C	160° C
Steam Generator	12 L/p.h	7 L/p.h

TEKTEM MAKİNA
SAN. VE TİC. A.Ş.

Esenehir Mah.Necip Fazıl Bulvarı No.23 Y.Dudullu
Ümraniye / İstanbul - **TÜRKİYE**

Telefon: +90.216.499 90 90pbx
Fax: +90.216.526 27 00
mail@cleanvac.com

www.cleanvac.com



Post Code : 34760

 +90 555 980 80 00

