




MONNIT[®]

Remote Monitoring for Business

2022 Product Catalog


About Monnit

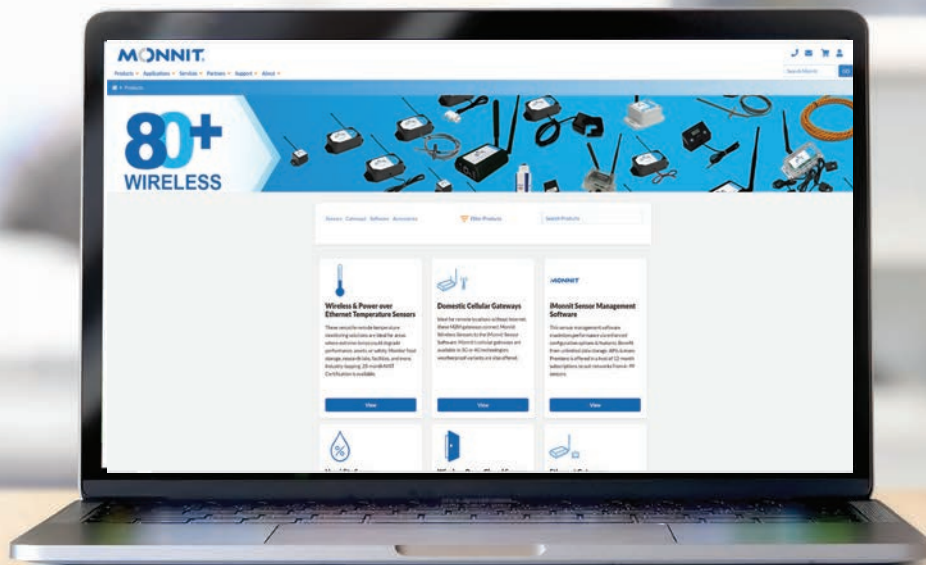

With over 10 years in developing IoT data, Monnit has entrenched its place as a global IoT leader with over 45,000 customers, over 21 billion data readings, and more than 2,000 product SKUs.

Monnit's intention is to be the global leader in touch points to Enterprise. Our team is dedicated to innovation and customer satisfaction.

HOW MONNIT WORKS

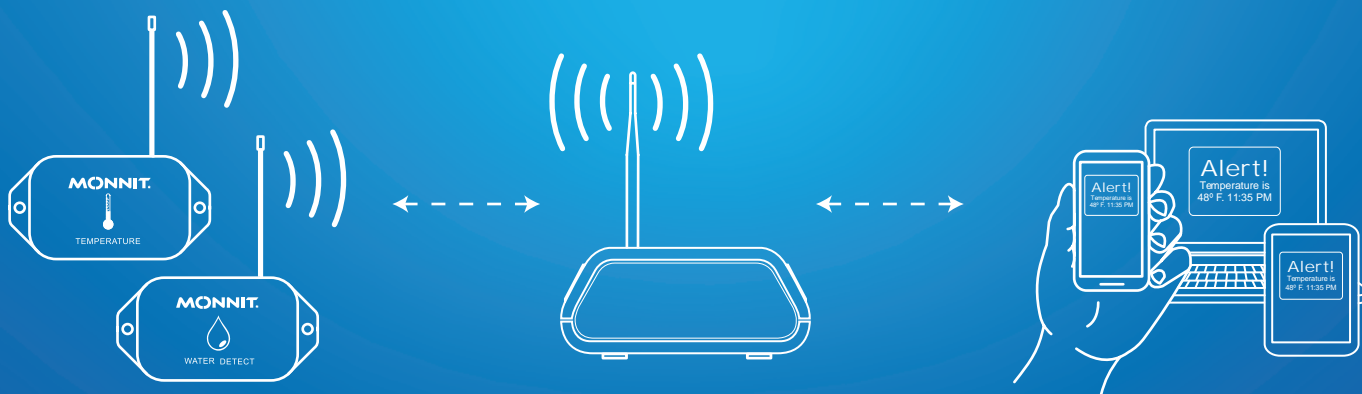

80+ Sensors
Monitor Important
Conditions.

Wireless Gateways
Relay Data to
Software.

Software Choices
Get Remote Access to
Dashboards / Alerts.



A **ALTA Wireless Sensors**
Monitor Virtually Anything Anywhere

C **PoE-X Sensors**
Power over Ethernet Experience

B **ALTA Gateways**
Take Control of Valuable Data

D **MoWi Sensors**
More Agility with Wi-Fi



ALTA® Wireless Sensors

Temperature Sensors	1	Water Detection	11
Wireless Standard Temperature Sensor	1	Wireless Water Rope Sensor	11
Wireless High Temperature Sensor	1	Wireless Water Detect +	11
Wireless Low Temperature Sensor	1	Wireless Water Detection Puck	11
Wireless Duct Temperature Sensor	2	Wireless Water Detection	12
Wireless Digital Temperature Sensor	2		
Humidity Sensors	2	Wireless Pulse Counter	12
Open / Closed Sensors	3	Wireless Pressure Sensors	12
Motion and Occupancy Sensors	3	Wireless 50 PSIG Pressure Meter	12
Wireless PIR Motion Sensor	3	Wireless 300 PSIG Pressure Meter	13
Wireless Motion+ Sensor	3	Wireless Button Press Sensors	13
AC Current Meters	3	Wireless Gas Detection Sensors	13
Wireless 20 Amp AC Current Meter	3	Wireless Carbon Monoxide (CO) Sensor	13
Wireless 150 Amp AC Current Meter	4	Wireless Carbon Dioxide (CO ₂) Sensor	14
Wireless 500 Amp AC Current Meter	4	Wireless Carbon Dioxide (H ₂ S) Sensor	14
Light Meters	4	Resistance Sensors	14
Wireless LUX Light Meter	4	Ultrasonic Ranging Sensors	15
Wireless PAR Light Meter	4	Wireless Enterprise Ultrasonic Sensor	15
Three-Phase Current Meters	5	Wireless Industrial Ultrasonic Sensor	15
Wireless 20 Amp Three-Phase Current	5	Air Quality Sensor	15
Wireless 150 Amp Three-Phase Current	5	Air Velocity Sensor	16
Wireless 500 Amp Three-Phase Current	5	Differential Air Pressure Sensor	16
Interface Meters	6	Food Probe Thermometer	16
Wireless Dry Contact	6	Vehicle Detection Sensor	17
Wireless 20 mA Interface Current Meter	6	Propane Tank Level Sensor	17
Wireless 0-5 VDC Interface Volt Meter	6	Soil Moisture Sensor	18
Wireless 0-10 VDC Interface Volt Meter	6	Monnit Sensor Sizes	19
Thermocouple Sensors	7		
Accelerometers	7		
Wireless G-Force Snapshot Accelerometer	7		
Wireless Advanced Vibration Meter	7		
Wireless Tilt Detection Sensor	8		
Wireless Vibration Meter	8		
Wireless G-Force Max - Avg Accelerometer	8		
Wireless Tilt Sensor	9		
Wireless Voltage Detection	9		
Wireless 200 VDC Voltage Meter	9		
Wireless 0-500 VAC Voltage Meter	10		
Wireless 200 VDC Voltage Detection Sensor	10		
Wireless 500 VDC Voltage Detection Sensor	10		



For more information about our products or to place an order, please contact our sales department at info@monnit.com or 801-561-5555. Visit us on the web at www.monnit.com.

Temperature Sensors

Wireless Standard Temperature Sensors

The ALTA Wireless Temperature Sensors uses a type NTC thermistor to measure temperature. The sensor outputs the ambient temperature in degrees Fahrenheit. The sensor is accurate to $\pm 1^{\circ}\text{C}$ ($\pm 1.8^{\circ}\text{F}$). Increased accuracy to $\pm 0.25^{\circ}\text{C}$ ($\pm 0.45^{\circ}\text{F}$) can be accomplished with user calibration.

Battery / Enclosure

AA
Coin Cell
Industrial

Part Number

MNS2-9-W2-TS-ST
MNS2-9-W1-TS-ST
MNS2-9-IN-TS-ST

Longer probe lengths are available for this product!



Wireless High Temperature Sensors

ALTA Wireless High Temperature Sensors use an RTD to accurately measure temperatures from -50°C to $+370^{\circ}\text{C}$. The solution is perfect for high temperature critical applications such as ovens, heaters, furnaces and boilers.

Battery / Enclosure

AA
Industrial

Part Number

MNS2-9-W2-TS-HT-L03
MNS2-9-IN-TS-HT-L03

Longer probe lengths are available for this product!



Wireless Low Temperature Sensors

ALTA wireless Low Temperature Sensors use an RTD to accurately measure temperatures from -200°C to $+162^{\circ}\text{C}$. This solution is recommended for medical grade coolers that cool at temps colder than -40°C , cryogenic applications, as well as standard freezers and refrigerators.

Battery / Enclosure

AA
Industrial

Part Number

MNS2-9-W2-TS-LT-L03
MNS2-9-IN-TS-LT-L03

Longer probe lengths are available for this product!



Wireless Duct Temperature Sensors

Wireless Duct Temperature Sensors in commercial, enterprise, and industrial-grade housings are available for duct monitoring. Each duct temp sensor features a probe temperature range of -40°C to +150°C (-40°F to +302°F) and an NTC type thermistor with UL listed plenum cable for superior accuracy.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-TS-DT-L08
Coin Cell	MNS2-9-W1-TS-DT-L08
Industrial	MNS2-9-IN-TS-DT-L08



Wireless Digital Temperature Sensor

Monnit's ALTA Digital Temperature Sensor has a range of -40°F to +257°F (-40°C to +125°C) to support cold food storage, clinical vaccine storage, research labs, and other health-related fields.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-TS-SD-L03



Humidity Sensors

Wireless Humidity Sensors

ALTA Wireless Humidity Sensors allow you to monitor the relative humidity of the air within a room or enclosure. This solution is ideal for monitoring humidity within greenhouses, industrial spaces, museums, saunas, and humidors. They can also be used for residential applications such as controlling mold, mildew, or dust mites.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-HU-RH
Coin Cell	MNS2-9-W1-HU-RH
Industrial	MNS2-9-IN-HU-RH



Open / Closed Sensor

Wireless Open / Closed Sensor

ALTA Wireless Open / Closed sensors provide information on the status of doors, windows, cabinets, etc. Know if a building or area is being accessed when it should not be, or if a door or window has been left open.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-OC-ST
Coin Cell	MNS2-9-W1-OC-ST
Industrial	MNS2-9-IN-OC-ST



Infrared Motion & Occupancy Sensors

Wireless Infrared Motion Sensor

Detect motion by people or animals in virtually any area or room up to 15 feet and within an 80° angle. The Monnit ALTA Wireless PIR Motion Sensors use passive infrared (PIR) technology to detect heat signatures to augment facility security, protect assets, and optimize building services through usage data. A wide-angle option even tracks a broader view of 110° to give you a good look into what's happening at your facilities.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-MS-IR
AA (Wide Angle)	MNS2-9-W2-MS-IR-WA
Coin Cell	MNS2-9-W1-MS-IR



Wireless Infrared Motion+ Sensor

Monitor movement, ambient temperature, and relative humidity (RH) with the three-in-one ALTA Wireless Motion+ Sensor. The easy-to-install multi-sensor can alert facility managers about three essential conditions in virtually any environment. Measure motion up to 15 feet and within an 80° angle. Track temperature between - 0°F to +257°F (-40°C to +125°C). Monitor up to 100% RH with a scientific-grade element.

Battery / Enclosure	Part Number
AA - BLACK	MNS2-9-W2-MS-IRH
AA - WHITE	MNS2-9-W2-MS-IRH-WE



AC Current Meters

Wireless 20 Amp AC Current Meter

This low power, 20 Amp AC Current Meter remotely audits power consumption. The electric power draw of servers, vending machines, or workout machines can all be monitored using this current transducer.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-CM-020
Industrial	MNS2-9-IN-CM-020



Wireless 150 Amp AC Current Meter

Remotely monitoring your business with a 150 Amp AC Current Meter opens up many possibilities. This is enough to measure the power consumption of server systems and current used by low to medium power industrial equipment.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-CM-150
Industrial	MNS2-9-IN-CM-150



Wireless 500 Amp AC Current Meter

A one-phase high power 500 Amp AC Current Meter is ideal for measuring commercial generators' power consumption, heavy duty industrial equipment, or main breakers in industrial and commercial breaker panels.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-CM-500
Industrial	MNS2-9-IN-CM-500



Light Meter

Wireless LUX Light Meter

Wireless ALTA Lux Light Meters monitor light intensity from (0-83,000 lux) indoors. The ALTA Lux Light Meter helps protect valuable assets like artifacts, pharmaceuticals, and food ingredients from excessive light exposure and improve security system lighting.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-LS-LM
Industrial	MNS2-9-IN-LS-LM



Wireless PAR Light Meter

The scientific-grade ALTA Wireless Photosynthetically Active Radiation (PAR) Light Meter measures the light spectrum (389 to 692 nanometers) that directly affects plant health and growth. Ideal for agritech operations, the PAR Light Meter helps growers monitor the performance of grow lighting systems to give crop canopies the light needed for photosynthesis.

Battery / Enclosure	Part Number
Industrial	MNS2-9-IN-LS-PAR



Three-Phase Current Meters

Wireless 20 Amp Three-Phase Current Meter

Incorporate this 20-amp Three-Phase, revenue grade device into facilities relying on powerful devices and systems, such as machine shops. Remotely monitor power consumption to track motor health or power system faults. Monitor min/max RMS current, duty cycle of each phase combined amp hours, and other metrics.

Battery / Enclosure
Industrial

Part Number
MNS2-9-IN-3P-020



Wireless 150 Amp Three-Phase Current Meter

Remotely monitoring your business with a 150 Amp AC Current Meter opens up many possibilities. This is enough to measure the power consumption of medium to heavy duty three-phase systems: environmental chambers, very large HVAC systems, or medium and heavy duty industrial motors.

Battery / Enclosure
Industrial

Part Number
MNS2-9-IN-3P-150



Wireless 500 Amp Three-Phase Current Meter

Use this sensor and be alerted about imbalances or power faults. The sensor uses 3 x 0-500 amp current transducers to monitor the main power for commercial buildings.

Battery / Enclosure
Industrial

Part Number
MNS2-9-IN-3P-500



Interface Meters

Wireless Dry Contact Sensors

The ALTA Wireless Dry Contact sensor detects when there is contact between the two wired end points. It can easily be integrated into existing switches or contact plates. When the sensor detects contact between the two end points, it will immediately turn on the RF radio and transmit the data to the wireless gateway and iMonnit Monitoring and Notification System.

Battery / Enclosure

AA
Coin Cell
Industrial

Part Number

MNS2-9-W2-DC-CF-L01
MNS2-9-W1-DC-CF-L01
MNS2-9-IN-DC-CF-L01

Longer probe lengths are available for this product!



Wireless 20 mA Interface Current Meter

Easily update existing scientific or industrial sensors to wirelessly collect process data. Remotely monitor current transducers, as well as oxygen, pH, magnetic flow sensors, and more.

Battery / Enclosure

AA
Coin Cell
Industrial

Part Number

MNS2-9-W2-MA-020
MNS2-9-W1-MA-020
MNS2-9-IN-MA-020



Wireless 0-5 VDC Interface Volt Meter

Easily monitor potential differences (voltage) between two electrical points. Use turnkey voltage meters to retrofit common industrial sensors, monitor batteries, renewable energy sources and more.

Battery / Enclosure

AA
Coin Cell
Industrial

Part Number

MNS2-9-W2-VM-005
MNS2-9-W1-VM-005
MNS2-9-IN-VM-005



Wireless 0-10 VDC Interface Volt Meter

Add turnkey Wireless Voltage Meters to commonly used industrial sensors and remotely monitor the voltage between two points. Get data from previously "dumb" devices to optimize operations.

Battery / Enclosure

AA
Coin Cell
Industrial

Part Number

MNS2-9-W2-VM-010
MNS2-9-W1-VM-010
MNS2-9-IN-VM-010



Thermocouple

Wireless Thermocouple Sensors

The ALTA Wireless Thermocouple is available with either a hardwired thermocouple or a K-Type connector (for supporting various thermocouple types and ranges) to measure high temperature applications. The hardwired thermocouple option measures temperatures from -100C (-148F) to 400°C (752°F).



FIXED PROBE

Battery / Enclosure	Part Number
AA	MNS2-9-W2-TS-TC-HW
Coin Cell	MNS2-9-W1-TS-TC-HW
Industrial	MNS2-9-IN-TS-TC-HW

K-TYPE CONNECTOR

Battery / Enclosure	Part Number
AA	MNS2-9-W2-TS-TC-KP
Coin Cell	MNS2-9-W1-TS-TC-KP
Industrial	MNS2-9-IN-TS-TC-KP

Accelerometers

Wireless G-Force Snapshot Accelerometer

The G-Force Snapshot sensor activates at a set time interval (defined by user) and measures g-force along X, Y, and Z axes. Primary use is as an inclinometer or tilt sensor.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-AC-GS
Coin Cell	MNS2-9-W1-AC-GS
Industrial	MNS2-9-IN-AC-GS



Wireless Advanced Vibration Meter

The Advanced Vibration Meter uses an accelerometer to measure vibration and frequency on three axes. The sensor reports vibration (acceleration, velocity, displacement, or acceleration peak), frequency (Hz/RPM), and crest factor on all three axes. It also reports duty cycle (how much of the report interval that vibration was present), and temperature.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-AC-ADV
Industrial	MNS2-9-IN-AC-ADV-L10



Wireless Tilt Detection Sensor

With a measurement range of 0-180° and accuracy of 0.5°, this sensor instantly reports (in degrees) when movement exceeds preset limits. If a guard arm is breached, the tilt detect sensor sends an alert via a text, email, or call. The device can sense whether it is “Up,” “Down,” and “Stuck.” Any movement between these regions will be recorded.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-AC-TT
Coin Cell	MNS2-9-W1-AC-TT
Industrial	MNS2-9-IN-AC-TT



Wireless Vibration Meter

The vibration meter reports data as speed (mm/s) and frequency (Hz) on all three axes, and how long the sensor was measuring during the interval. Measurement methods are: Peak acceleration RMS, peak velocity RMS, and true RMS.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-AC-VM
Industrial	MNS2-9-IN-AC-VM



Wireless G-Force Max-Avg Accelerometer

The G-Force Max/Avg sensor measures the maximum and average g-force values along X, Y, and Z axes. Custom Delta values allow for the user to set thresholds which, when exceeded, will trigger the sensor to report in immediately. Configurable data rates allow for more samples to be collected for every measurement with higher data rates resulting in faster reaction time. The data reported is useful for tracking periodic motion and event detection.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-AC-GM
Industrial	MNS2-9-IN-AC-GM



Wireless Tilt Sensor

Better understand your operations, machine health, or structure status by collecting inclination data or tracking pitch and roll with Monnit's ALTA Wireless Tilt Sensors. If a tilt sensor detects a deviation from your preset limits during measurement, an alert is issued via a text, email, or call.

Battery / Enclosure

AA
Coin Cell
Industrial

Part Number

MNS2-9-W2-AC-TL
MNS2-9-IN-AC-TL
MNS2-9-W1-AC-TL



Wireless Voltage Detection

Wireless 200 VDC Voltage Meter

Integrate a Wireless 200 VDC Voltage Meter to monitor the electrical status of items you depend on, like industrial lift trucks, solar PV panels, and power banks. Remotely monitor status and operation.

Battery / Enclosure

AA
Coin Cell
Industrial

Part Number

MNS2-9-W2-VM-200
MNS2-9-W1-VM-200
MNS2-9-IN-VM-200



Wireless 500 VAC Voltage Meter

Integrate a Wireless 200 VDC Voltage Meter to monitor the electrical status of items you depend on, like industrial lift trucks, solar PV panels, and power banks. Remotely monitor status and operation.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-VM-500
Coin Cell	MNS2-9-W1-VM-500
Industrial	MNS2-9-IN-VM-500



Wireless 200 VDC Voltage Detection Sensor

This Wireless 200 VDC Voltage Sensor monitors the on/off status of equipment, machines, or battery levels. Track power sources up to 200 VDC for industrial vehicles, ATVs, adapters, PV solar equipment and more.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-VD-200
Coin Cell	MNS2-9-W1-VD-200
Industrial	MNS2-9-IN-VD-200



Wireless 500 VAC Voltage Detection Sensor

Wirelessly monitor voltage for critical equipment and systems up to 500 VDC. Keep an eye on sprinkler systems, HVAC, power couplings, and sump pumps. Know about electrical faults and act quickly to keep business moving.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-VM-500
Coin Cell	MNS2-9-W1-VM-500
Industrial	MNS2-9-IN-VM-500



Water Detection Sensors

Wireless Rope Sensor

The ALTA Wireless Water Rope Sensor detects the presence of water anywhere along the surface of the rope. The sensor comes with 10 feet of water rope. Additional 10 ft. sections are available and can be connected up to 100 feet.

Battery / Enclosure

AA
Coin Cell
Industrial

Part Number

MNS2-9-W2-WS-WR
MNS2-9-W1-WS-WR
MNS2-9-IN-WS-WR



Wireless Water Detect Plus Sensors

The Wireless Water Detect Plus Sensor employs a wall- or surface-mountable probe at the end of a 3' lead to detect water's presence (or absence). The probe is often used in sanitation or process applications to detect levels in reservoirs or vats of non-combustible liquid.

Battery / Enclosure

AA
Coin Cell
Industrial

Part Number

MNS2-9-W2-WS-WP-L03
MNS2-9-W1-WS-WP-L03
MNS2-9-IN-WS-WP-L03



Wireless Water Detection Puck

Housed in a vulcanized hockey puck, this submersible sensor detects water's presence (or non-presence). Drop this sensor nearly anywhere to monitor for leaks / spills, e.g., production, manufacturing, or building maintenance.

Battery / Enclosure

AA - Black
AA - White

Part Number

MNS2-9-PK-WS-PS
MNS2-9-PK-WS-PS-WT



Wireless Water Detection Sensors

These popular sensors detect the presence (or non-presence) of non-combustible liquids (e.g., water). Deploy in such applications as sump pump monitoring, water heater drip pan monitoring, or between dry wall and sub flooring.

Battery / Enclosure

AA
Coin Cell
Industrial

Part Number

MNS2-9-W2-WS-WD-L03
MNS2-9-W1-WS-WD-L03
MNS2-9-IN-WS-WD-L03



Pulse Counters

Wireless Pulse Counters

The ALTA Wireless Pulse Counter can be connected to the pulse output of a system (water meter, power meter, etc.) to count the number of actuations within a given time frame. The wireless pulse counter is an electronic counter capable of counting passive (open/closed switch) or active (up to +15 VDC) pulses.

Battery / Enclosure

AA
Coin Cell
Industrial

Part Number

MNS2-9-W2-PC-01
MNS2-9-W1-PC-01
MNS2-9-IN-PC-01



Pressure Meters

Wireless 50 PSIG Pressure Meters

Monnit's Wireless 50 PSIG Pressure Meters keep lab managers, field service engineers, and other professionals connected to processes and machinery. If line pressure deviates from user-set thresholds, this pressure sensor instantly alerts the user via a text, email, or call.

Battery / Enclosure

AA
Industrial

Part Number

MNS2-9-W2-PS-050
MNS2-9-IN-PS-050



Wireless 300 PSIG Pressure Meters

Indispensable to facility managers, fabricators, and legacy machine operators, Monnit's 300 PSIG Wireless Pressure Meter remotely monitors line pressures (gas, liquid, or vapors). If pressure exceeds user-defined limits, the user receives an alert via an email, call, or text.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-PS-300
Industrial	MNS2-9-IN-PS-300



Button Press Sensors

Wireless Button Press Sensors

Need help providing swift customer service or deploying a large-scale sensor network? Instant alerts from Monnit's Wireless Button Press Sensors support you by streamlining sensor deployment and expediting customer service requests.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-TS-ST
Coin Cell	MNS2-9-W1-TS-ST



Gas Detection Sensors

Wireless Carbon Monoxide (CO) Sensor

This unique battery-powered sensor monitors job sites, offices, and residential complexes for carbon monoxide (CO). Within a small footprint, the MEMS-based device packs a 0-1,000 PPM measurement range and automated data logging.

Battery / Enclosure	Part Number
AA	MNS2-9-W2-GS-C1



Wireless Carbon Dioxide (CO₂) Sensor

Trusted by facility managers, this MEMS-based sensor monitors CO₂ levels in the air. Get an alert if CO₂ levels surpass preset limits. It's used to protect indoor air quality in greenhouses, marine vessels, and HVAC systems.

Battery / Enclosure
AA

Part Number
MNS2-9-W2-GS-C2



Wireless Hydrogen Sulfide (H₂S) Gas Sensor

This safety sensor tracks the presence of H₂S gas, which is toxic and flammable. Use to safeguard workers in oil / gas production, wastewater treatment, utilities, and other hazardous areas.

Battery / Enclosure
AA

Part Number
MNS2-9-W2-GS-H2S



Resistance Sensors

Wireless Resistance Sensor

These sensors read the resistance across a resistive load up to 250K Ohms and are meant to connect to passive devices only.

Battery / Enclosure
AA
Coin Cell
Industrial

Part Number
MNS2-9-W2-RS-ST-L03
MNS2-9-W1-RS-ST-L03
MNS2-9-IN-RS-ST-L03



Ultrasonic Ranging Sensors

Wireless Enterprise Ultrasonic Ranging Sensor

This enterprise-grade remote monitoring solution measures the distance between itself and objects in its path. Use for liquid-level detection, inventory status, object detection and other indoor or outdoor applications.

Battery / Enclosure

AA

Part Number

MNS2-9-W2-US-ST



Wireless Industrial Ultrasonic Ranging Sensor

Packaged in a weatherproof housing, Monnit's ALTA Industrial Ultrasonic Ranging Sensor measures levels or detects objects. Indoor and outdoor applications include vehicle / object detection, capturing liquid levels, and tracking inventory.

Battery / Enclosure

Industrial

Part Number

MNS2-9-IN-US-IN-MPL-PA



Air Quality Sensor

Wireless Air Quality Sensor

This mount-and-monitor device measures particulate matter that's coarse (PM10), fine (PM2.5), and ultra-fine (PM1) inside mines, production facilities, commercial kitchens and facilities, as well as business buildings. This unit is powered by line-power and has a battery backup.

Battery / Enclosure

AA

Part Number

MNS2-9-W2-AQ-P25A-LPO



Air Velocity Sensors

Wireless Air Velocity Sensors

The Air Velocity Sensor measures the pressure difference between two input ports, as well as ambient temperature and altitude to determine airflow speed in a system. Use in sensitive areas, e.g., hospitals and clean rooms.

Battery / Enclosure

AA
Industrial

Part Number

MNS2-9-W2-PS-AV-LPO
MNS2-9-IN-PS-AV



Differential Air Pressure Sensors

Wireless Differential Air Pressure Sensors

This sensor measures the pressure difference between its two ports. Ideal for food service, healthcare, and academia. Common applications include clean rooms, pharmaceutical production, commercial kitchens, and HVAC or applications where negative air pressure monitoring is required.

Battery / Enclosure

AA
Industrial

Part Number

MNS2-9-W2-PS-DP-LPO
MNS2-9-IN-PS-DP



Food Probe Thermometer

Wireless Food Probe Thermometer

The ALTA Food Probe replaces manual temperature checks and enhances food quality and safety by bringing the power of remote data collection to commercial kitchens, food production, and restaurants.

Battery / Enclosure

AAA

Part Number

MNS2-9-W2-TS-FP



Vehicle Detection Sensor

Wireless Vehicle Detect / Counter Sensor

This easy-to-deploy sensor detects vehicle presence, counts traffic, and tracks the time a vehicle is parked. Ideal for fleet management, parking garages, service centers, curbside retail, and more.

Battery / Enclosure
Industrial

Part Number
MNS2-9-IN-VS-TT



Propane Tank Monitoring

Wireless Propane Tank Level Sensor

Remotely monitor propane levels from anywhere via a smartphone or PC. This turnkey propane sensor works with Sr & Jr R3D® Remote Ready gauges. Prevent unnecessary in-the-field trips and maintain customer satisfaction.

Battery / Enclosure
Industrial

Part Number
MNS2-9-IN-HE-MG




Soil Moisture Monitoring

Soil Moisture Sensor

Get critical insights from your soil about how well you water with the ALTA Wireless Soil Moisture Sensor. It's perfect for measuring soil water tension (within a range of 0 to 240 centibar (cb) or kilopascal (kPa)) and temperature (-40°C to 125°C (-40°F to 257°F)). Improving irrigation scheduling and water conservation is easier because you'll know when and where to water your crops more precisely.


Battery / Enclosure
Industrial

Part Number
MNS2-9-IN-WS-WM-L05

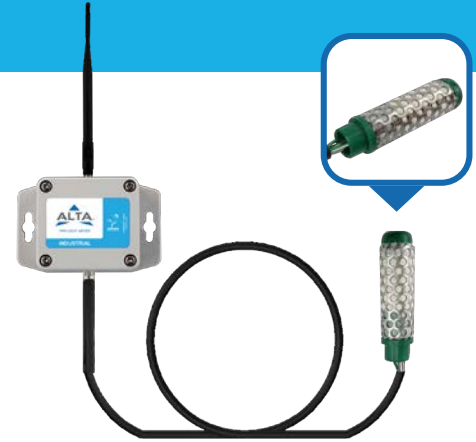

Monnit Sensor Sizes

COIN CELL (CC)

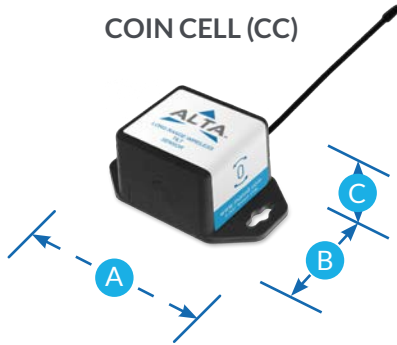


- A: 2.0 inches / 50.8 mm
- B: 1.125 inches / 28.57 mm
- C: .875 inches / 22.22 mm

DOUBLE AA (AA)



- A: 4.375 inches / 111.12 mm
- B: 2.470 inches / 62.73 mm
- C: 1.111 inches / 28.21 mm

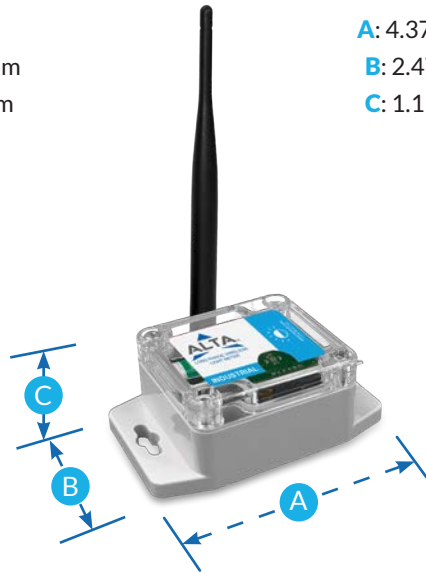

INDUSTRIAL (IN)

- A: 3.701 inches / 94.00 mm
- B: 2.316 inches / 58.82 mm
- C: 1.378 inches / 35 mm

Dimensions for standard housing sizes.
For sensors in non-typical housings, please refer to their data sheets.

MONNIT®

Monnit Corporation

3400 South West Temple • Salt Lake City, UT 84115 • 801-561-5555
www.monnit.com





ALTA® Gateways

4G LTE Cellular Gateways	1	Modbus Gateway	4
4G LTE Industrial Gateway	1	Serial Modbus Gateway	4
4G LTE Commercial Gateway	1	Sensor Adaptor	4
3G Cellular Gateways	1	Wireless Sensor Adaptor	4
3G Industrial Cellular Gateway	1		
3G Commercial Cellular Gateway	2		
International Gateways	2		
3G Interantional Gateway	2		
2G International Gateway	2		
Ethernet Gateway	3		
ALTA Ethernet Gateway 4	3		
Advanced EDGE Gateway	3		
Advanced EGDE Gateway	3		



For more information about our products or to place an order, please contact our sales department at info@monnit.com or 801-561-5555. Visit us on the web at www.monnit.com.

4G LTE Cellular Gateways

4G LTE Industrial Cellular Gateway

Monnit® 4G LTE Cellular Gateways are based on a 4G LTE CAT-M1/NB1 wireless module and integrates Monnit's wireless base station node (BSN) for use with Monnit Wireless Sensors. These gateways allow the sensors to operate on 4G networks in select countries.

To meet the global demand for enterprise IoT deployment, the 4G LTE Gateway offers best-in-class security, connectivity, and reliability. Monnit cellular gateways communicate with the iMonnit® (cloud or on-premise) monitoring software via cellular transmission, making them ideal for remote locations or where the internet is not available. The system aggregates sensor information and sends notifications via text, email, or call if user-defined conditions are met or exceeded.

Part Number

MNG2-9-LTE-IN-ND



4G LTE Commercial Cellular Gateway

Monnit® 4G LTE Cellular Gateways are based on a 4G LTE CAT-M1/NB1 wireless module and integrates Monnit's wireless base station node (BSN) for use with Monnit Wireless Sensors. These gateways allow the sensors to operate on 4G networks in select countries.

To meet the global demand for enterprise IoT deployment, the 4G LTE Gateway offers best-in-class security, connectivity, and reliability. Monnit cellular gateways communicate with the iMonnit® (cloud or on-premise) monitoring software via cellular transmission, making them ideal for remote locations or where the internet is not available. The system aggregates sensor information and sends notifications via text, email, or call if user-defined conditions are met or exceeded.

Part Number

MNG2-9-LTE-CCE-ND



3G Cellular Gateways

3G Industrial Cellular Gateway

Monnit Domestic 3G Cellular Gateways (for use in USA, Canada and Mexico) are based on a 3G (GSM HSPA+) wireless engine and comes integrated with Monnit's wireless base station node (BSN) for use with all Monnit Wireless Sensors. These gateways allow the sensors to operate on the world's leading cellular networks.

Monnit cellular gateways communicate with the iMonnit® (cloud or on-premise) monitoring software via cellular transmission, making them ideal for remote locations or where the internet is not available. The system aggregates sensor information and sends notifications via text, email, or call if user-defined conditions are met or exceeded.

Part Number

MNG2-9-3C3N-IN



3G Commercial Cellular Gateway

Monnit Domestic 3G Cellular Gateways (for use in USA, Canada and Mexico) are based on a 3G (GSM HSPA+) wireless engine and comes integrated with Monnit's wireless base station node (BSN) for use with all Monnit Wireless Sensors. These gateways allow the sensors to operate on the world's leading cellular networks.

Monnit cellular gateways communicate with the iMonnit® (cloud or on-premise) monitoring software via cellular transmission, making them ideal for remote locations or where the internet is not available. The system aggregates sensor information and sends notifications via text, email, or call if user-defined conditions are met or exceeded.

Part Number

MNG2-9-3C3N-SC



International Gateways

3G International Gateway

The Monnit International 3G Cellular Gateway (for use in 868MHz (Europe, Middle East, Africa) and for 433MHz (Asia Pacific except Japan and Korea), is based on a 3G (UMTS/GSM) wireless engine and comes integrated with Monnit's wireless access point network (WAN) for use with all Monnit Wireless Sensors. These gateways allow the sensors to operate on the world's leading cellular networks.

Monnit cellular gateways communicate with the iMonnit® (cloud or on-premise) monitoring software via cellular transmission, making them ideal for remote locations or where the internet is not available. The system aggregates sensor information and sends notifications via text, email, or call if user-defined conditions are met or exceeded.

Part Number

MNG2-8-3C3I-SC (EMEA)

MNG2-4-3C3I-SC (APAC)



Ethernet Gateways

ALTA Ethernet Gateway 4

Monnit's Ethernet Gateway allows your Monnit Wireless Sensors to communicate with the iMonnit™ Online Wireless Sensor Monitoring and Notification System without the need for a PC. Simply provide power and plug the gateway into an open Ethernet network port with an internet connection.

It will then automatically connect with our online servers, providing the perfect solution for commercial locations where there is an active internet connection.

The Power-Over-Ethernet option features modified gateway hardware allowing it to be powered through the Ethernet port. (Does not include PoE Power Injector.)

Interfaces supported: Modbus, TCP/IP, and SNMP.

Part Number

MNG2-9-EGW-CCE



Advanced EDGE Gateway

Advanced EDGE Gateway

The multiple award-winning Advanced EDGE Gateway aggregates data from feature-rich Monnit Wireless Sensors to mainstream cloud providers, such as Amazon AWS, Google Cloud Platform, Microsoft Azure, or IBM Watson. Coupling the prominent MQTTS protocol and the IoT's broadest sensor range, Monnit's Edge Gateway fulfills a key IoT mission of making deployments more agile and productive.

The Edge Gateway features a step-by-step guided, multilingual web interface for configuring and managing Monnit Wireless Sensors, as well as designating MQTT brokers. As the Ethernet-based gateway receives sensor data, the gateway "fingerprints" the data with a cryptographic validation stamp. This authenticated data is then transmitted to a cloud broker (or multiple brokers), where it arrives in a standard format. The Edge Gateway's integrated macros enable data configuration in virtually any format, such as JSON or XML, making it a powerful tool for data analysis and action.

Part Number

MNG2-9-EDG-CCE



Advanced EDGE Gateway - 3 Time Award Winner!



Modbus

Serial Modbus Gateway

The ALTA Serial MODBUS Gateway (SMG) acts as a data concentrator for Monnit's ALTA long range wireless sensor networks. This device allows you to connect up to 50 wireless sensing devices, per gateway, to your PLC or similar RS232/485 device.

Monnit has recognized the importance of using open standards like Modbus, allowing ALTA wireless sensors to be used in the majority of industrial applications.

Modbus is often used to connect a supervisory computer with a remote terminal unit (RTU) in supervisory control and data acquisition (SCADA) systems.

Part Number

MNG2-9-SG-SMG



Sensor Adaptor

Wireless Sensor Adaptor

The ALTA® Wireless Sensor Adapter enables Monnit Wireless Sensors to communicate with your local or online wireless sensor monitoring system by connecting to a PC or third-party IoT gateways via USB connection. (Windows or Linux.)

Plug into a PC

If an on-site PC has an active Internet connection, it's simple to connect with iMonnit Sensor Configuration and Management Software online and install the free Monnit Gateway application. This combination allows you to pass sensor data to the online system.

The ALTA wireless sensor adaptor is specifically designed to respond to the increasing market need for global technology that accommodates several vertical M2M application segments and remote wireless sensor management solutions.

Part Number

MNG2-9-WSA-USB



Monnit Gateway Sizes



SENSOR ADAPTOR

- A:** 3.5 inches / 88.9 mm
- B:** 2.545 inches / 64.64 mm
- C:** 1.007 inches / 25.57 mm

COMMERCIAL



- A:** 3.8 inches / 96.52 mm
- B:** 5.004 inches / 127.10 mm
- C:** .151 inches / 38.35 mm

INDUSTRIAL



- A:** 5.7 inches / 144.78 mm
- B:** 3.54 inches / 89.91 mm
- C:** 2.14 inches / 54.35 mm

Dimensions for standard housing sizes.
For gateways in non-typical housings, please refer to their data sheets.



Monnit Corporation

3400 South West Temple • Salt Lake City, UT 84115 • 801-561-5555

www.monnit.com

