

**MODEL FL-D-4**

**HIGH PERFORMANCE 4" FIXED LOUVER**

**STANDARD CONSTRUCTION:**

**Frame:** .081 Extruded Aluminum, 4.19" Deep

**Blade:** .081 Extruded Aluminum positioned on a 37° angle on approximately 2.88" centers

**Birdscreen:** .75" x .051" Flattened Aluminum in removable frame. Screen is mounted as standard on inside (rear) as looking from exterior of building.

**Finish:** Mill Aluminum (Std.)

**Minimum Size:** 12 x12

**Maximum Single Section:** 120"w x 84"h or 84"w x 120"h





**Note:** 10' max width

**OPTIONS:**


- Flanged Frame (1.50" std.), (1" std for shapes R\_)
- Custom Flange (1", 2" , or 3"), (1.5", 2", or 3" for shapes R\_)
- Extended Sill
- Glazing Adapter (.50" or .75")
- Insect Screen (Other Screens Available, See Screen Page)
- Filter Racks (no screen)
- Security Bars
- Hinged Sub Frame
- Split Deflection 37°/ 0° Blades (Max Section width 48" on 0° Blades)
- Welded Construction (Wind Load +/- 50 psf)
- .125" Construction
- Blank-off, Alum., non-insulated, no screen, non-removeable
- Blank-off, Alum., non-insulated, with bird screen or insect screen
- Blank-off, Alum., insulated double wall, with bird screen, removable
- Blank-off, Alum., insulated double wall, no screen, non-removeable

**Available Finishes:**

- Durable Polyester (AAMA 2604)
- 70% PVDF Fluoropolymer (AAMA 2605)
- Yellow Primer
- Clear Anodize
- Dark Bronze Anodize

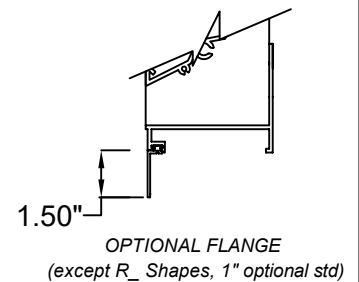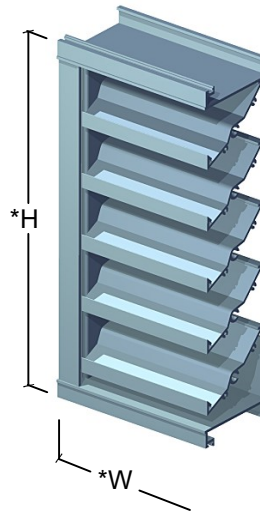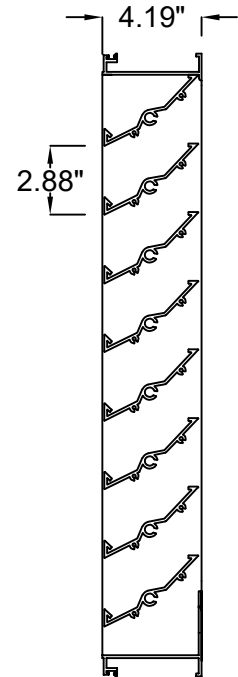

OPTIONAL GLAZING ADAPTER



OPTIONAL EXTENDED SILL

\*Width and Height dimensions are approximately 1/4" under listed size.

Due to continuing research, United Enertech reserves the right to change specifications without notice.



3005 South Hickory Street  
Chattanooga, Tennessee 37407  
Tel: (423) 698-7715  
Fax: (423) 698-6629  
www.unitedenertech.com

**MODEL FL-D-4 (Drainable Blade w/ Jamb Gutters & Downspouts)**

DRAWN BY: CLJ	DATE: April 2016	REV. DATE: May 2016	REV. NO. 3	APPROVED BY: MD	DWG. NO.: A-2
------------------	---------------------	------------------------	---------------	--------------------	------------------

## SUGGESTED SPECIFICATION

Finish and install louvers as hereinafter specified where shown on plans or as described in schedules. Louvers shall be stationary drainable type with drain gutters in each blade and downspouts in jambs and mullions. Stationary drainable blades shall be contained within a 4.19" frame. Louver components (heads, jambs, sills, blades, and mullions) shall be factory assembled by the louver manufacturer. Louver sizes too large for shipping shall be built up by the contractor from factory assembled louver sections to provide overall sizes required. Louver design shall incorporate structural supports required to withstand a wind load of 30 lbs. per sq. ft. (optional 50 lbs. per sq. ft.) (equivalent of a 110 mph wind).

Louvers shall be United Enertech FL-D-4, 6063-T5 aluminum construction as follows:

FRAME: 4.19" deep, .081" nominal wall thickness


BLADES: .081" nominal wall thickness. Blades are positioned at 37° angle and spaced approximately 2.88" center to center.

SCREEN: 0.75" x .051" (19 x 1.3) expanded, flattened aluminum in removable frame.

FINISH: Select finish specification from United Enertech Finishes brochure.

Published louver performance data bearing the AMCA Certified Ratings seal for Air Performance & Water Penetration must be submitted for approval prior to fabrication and must demonstrate pressure drop and water penetration equal to or less than the United Enertech model specified.


## PERFORMANCE DATA

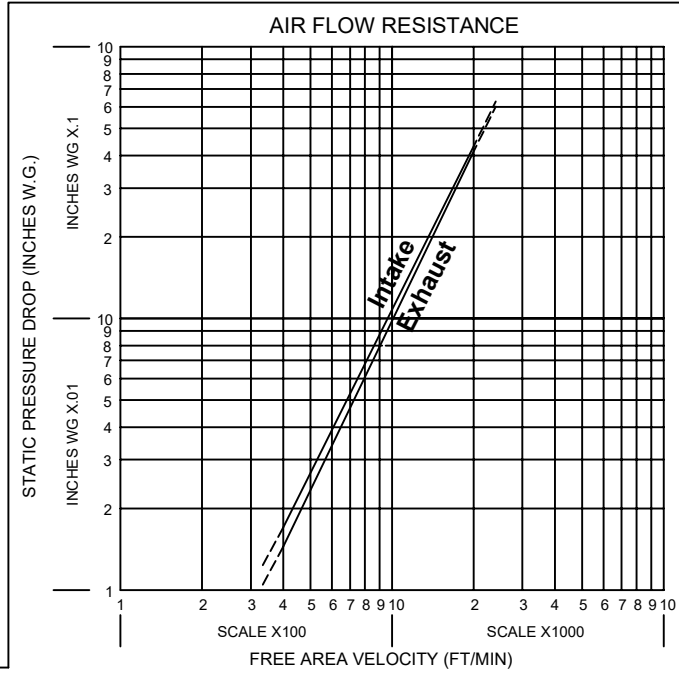

FREE AREA VELOCITY (FT/MIN)

Based on STANDARD AIR - .075 lb. per cubic foot.  
Ratings do not include the effects of screen.  
15 Minute Test Duration, Test Figure 5.5  
Test size 48" x 48"

## WATER PENETRATION

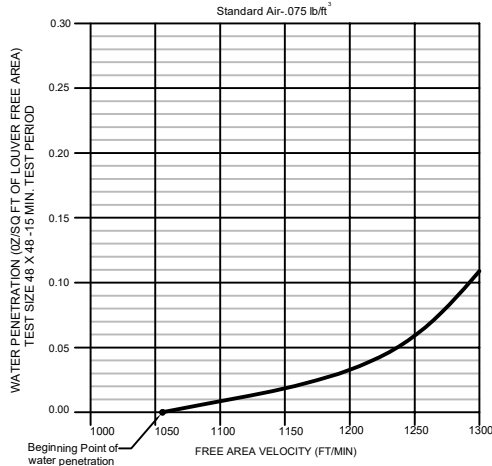

United Enertech Corporation certifies that the louver model shown hereon is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with the AMCA publication 511 and comply with the requirement of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to Air Performance and Water Penetration ratings.

Beginning point of WATER PENETRATION  
is  
1056 fpm  
free area velocity at .01 oz. of water penetration

AMCA Standard 500 provides a reasonable basis for testing and rating louvers. Testing to AMCA 500-L is performed under a certain set of laboratory conditions. This does not guarantee that other conditions will not occur in the actual environment where louvers must operate. The louver system should be designed with a reasonable safety factor for louver performance. To ensure protection from water carryover, design with a performance level somewhat below maximum desired pressure drop and .01 oz./sq. ft. of water penetration.

## FL-D-4 FREE AREA CHART (SQUARE FEET)

Louver Height Inches	Louver Width In Inches												Louver Height Inches							
	12	18	24	30	36	42	48	54	60	66	72	78		84	90	96	102	108	114	120
12	0.32	0.51	0.71	0.91	1.10	1.30	1.50	1.70	1.89	2.09	2.29	2.48	2.68	2.88	3.08	3.27	3.47	3.67	3.86	12
18	0.55	0.90	1.24	1.59	1.93	2.28	2.63	2.97	3.32	3.66	4.01	4.35	4.70	5.04	5.39	5.73	6.08	6.42	6.77	18
24	0.80	1.30	1.80	2.30	2.80	3.30	3.80	4.30	4.80	5.30	5.80	6.30	6.80	7.30	7.80	8.30	8.80	9.30	9.79	24
30	0.99	1.61	2.23	2.84	3.46	4.08	4.70	5.31	5.93	6.55	7.17	7.78	8.40	9.02	9.64	10.25	10.87	11.49	12.11	30
36	1.21	1.97	2.73	3.48	4.24	4.99	5.75	6.51	7.26	8.02	8.78	9.53	10.29	11.05	11.80	12.56	13.31	14.07	14.83	36
42	1.47	2.38	3.30	4.22	5.13	6.05	6.96	7.88	8.79	9.71	10.63	11.54	12.46	13.37	14.29	15.20	16.12	17.04	17.95	42
48	1.69	2.75	3.80	4.86	5.91	6.96	8.02	9.07	10.13	11.18	12.24	13.29	14.35	15.40	16.45	17.51	18.56	19.62	20.67	48
54	1.92	3.12	4.32	5.52	6.72	7.92	9.11	10.31	11.51	12.71	13.91	15.11	16.31	17.51	18.70	19.90	21.10	22.30	23.50	54
60	2.16	3.50	4.85	6.19	7.53	8.88	10.22	11.57	12.91	14.26	15.60	16.94	18.29	19.63	20.98	22.32	23.67	25.01	26.35	60
66	2.39	3.88	5.37	6.86	8.35	9.84	11.33	12.82	14.31	15.80	17.29	18.79	20.28	21.77	23.26	24.75	26.24	27.73	29.22	66
72	2.63	4.26	5.90	7.54	9.18	10.81	12.45	14.09	15.73	17.36	19.00	20.64	22.28	23.91	25.55	27.19	28.83	30.46	32.10	72
78	2.85	4.63	6.40	8.18	9.95	11.73	13.51	15.28	17.06	18.84	20.61	22.39	24.16	25.94	27.72	29.49	31.27	33.05	34.82	78
84	3.11	5.04	6.98	8.91	10.85	12.78	14.72	16.66	18.59	20.53	22.46	24.40	26.34	28.27	30.21	32.14	34.08	36.01	37.95	84
90	3.34	5.42	7.50	9.58	11.66	13.74	15.82	17.90	19.97	22.05	24.13	26.21	28.29	30.37	32.45	34.53	36.61	38.69	40.77	90
96	3.58	5.82	8.05	10.29	12.52	14.76	16.99	19.22	21.46	23.69	25.93	28.16	30.39	32.63	34.86	37.10	39.33	41.57	43.80	96
102	3.76	6.10	8.44	10.78	13.12	15.47	17.81	20.15	22.49	24.83	27.17	29.52	31.86	34.20	36.54	38.88	41.22	43.57	45.91	102
108	4.05	6.58	9.11	11.64	14.16	16.69	19.22	21.75	24.27	26.80	29.33	31.86	34.38	36.91	39.44	41.96	44.49	47.02	49.55	108
114	4.24	6.89	9.53	12.18	14.82	17.47	20.12	22.76	25.41	28.05	30.70	33.34	35.99	38.63	41.28	43.92	46.57	49.21	51.86	114
120	4.48	7.27	10.06	12.85	15.64	18.43	21.22	24.02	26.81	29.60	32.39	35.18	37.97	40.76	43.55	46.34	49.14	51.93	54.72	120