



3 Minutes




Before You Start:

- Make sure you have a router and high-speed Internet access (not included).
- Connect your DVR to your router using an Ethernet cable (see the Quick Connection Guide for details).
- Upgrade your DVR firmware and client software or mobile app to the latest versions.
- Please note that an upload speed of 1 Mbps is recommended for the best video performance. Up to 3 devices may connect to the system at the same time.



1A iPhone

- Install the free **Lorex ECO Stratus** app from the App Store.
- Tap the **Lorex ECO Stratus** icon to open the app.
- Tap **Device Manager**.
- Tap **+**.
- Configure the following:

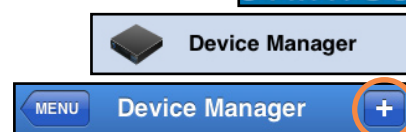

- Name:** Enter a name for your DVR of your choice.
- Device ID:** Press the QR code icon (📷) next to Device ID and line up the QR code on the top of the DVR using the camera on your device.
- Client Port:** Enter the **Client Port** (default: **9000**).
- User Name:** Enter the **DVR's User Name** (default: **admin**).
- Password:** Enter the **DVR's Password** (default: **000000**).



OR if your device does not have a camera, manually enter the Device ID printed on the label.


EXAMPLE

Device Manager	
1 Name	Lorex DVR
Login Type	Device ID
2 Device ID	rsd1b9f20719
3 Client Port	9000
4 User Name	admin
5 Password	
Channels	8
Disconnected	

- Tap **Save**. You will be prompted to change the DVR password. Tap **OK**.
- Enter a new 6 character password and tap **Done**. This password will be used to connect to your system from now on.
- Tap **Save** again to connect to the DVR. The app opens in Live View and streams video from all connected cameras.

1B iPad

- Install the free **Lorex ECO Stratus HD** app from the App Store.
- Tap the **Lorex ECO Stratus HD** icon to open the app.
- Tap .
- Tap **+**.
- Configure the following:



EXAMPLE

Config View	
Devices	New Devices
1 Device Name	DVR1
Login Mode	Device ID
2 Device ID	rsd580e13de6
3 Client Port	9000
4 User Name	admin
5 Password	
Channel Num	0
Disconnected	


- Name:** Enter a name for your DVR of your choice.
- Device ID:** Press the QR code icon (📷) next to Device ID and line up the QR code on the top of the DVR using the camera on your device.
- Client Port:** Enter the **Client Port** (default: **9000**).
- User Name:** Enter the **DVR's User Name** (default: **admin**).
- Password:** Enter the **DVR's Password** (default: **000000**).

OR if your device does not have a camera, manually enter the Device ID printed on the label.

- Tap **Save**. You will be prompted to change the DVR password. Tap **OK**.
- Enter a new 6 character password and tap **Done**. This password will be used to connect to your system from now on.
- Tap **Save** again to connect to the DVR. The app opens in Live View and streams video from all connected cameras.

1C Android

- Install the free **Lorex ECO Stratus** app from the Google Play Store.
- Tap the **Lorex ECO Stratus** icon to open the app.
- Tap **Device Manager**.
- Tap **Add**.
- Configure the following:

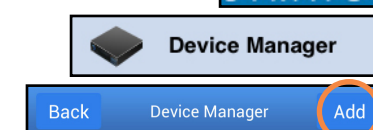

EXAMPLE

Device Manager	
1 Device Name	EC04
Login Type	Device ID
2 Device ID	dem6a99b4934
3 Client Port	9000
4 User Name	admin
5 Password	
Channels	8

OR if your device does not have a camera, manually enter the Device ID printed on the label.

- Name:** Enter a name for your DVR of your choice.
 - Device ID:** Press the QR code icon (📷) next to Device ID and line up the QR code on the top of the DVR using the camera on your device.
 - Client Port:** Enter the **Client Port** (default: **9000**).
 - User Name:** Enter the **DVR's User Name** (default: **admin**).
 - Password:** Enter the **DVR's Password** (default: **000000**).
- Tap **Save**. You will be prompted to change the DVR password. Tap **Confirm**.
 - Enter a new 6 character password and tap **Save**. This password will be used to connect to your system from now on.
 - Tap **Save** again to connect to the DVR. The app opens in Live View and streams video from all connected cameras.





2 Find your Device ID

The **Device ID** is printed on a label on the top panel of the DVR.



Record your information below:


DEVICE ID: _____

3 PC Users

a Download the **Client Software for PC** from lorex.ca/LH030.

b Once installation is finished, double-click the **Lorex Stratus Client 1 icon**  on the desktop. The DVR login appears.

c Enter the following information:

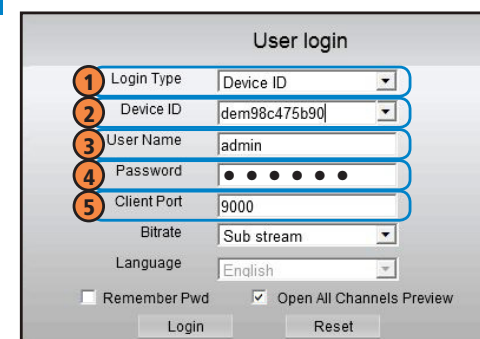

User login

1	Login Type	Device ID
2	Device ID	dem98c475b90
3	User Name	admin
4	Password	•••••
5	Client Port	9000
Bitrate		Sub stream
Language		English
☐ Remember Pwd		☒ Open All Channels Preview
Login		Reset

1 Select **Device ID**

2 Enter the **DVR's Device ID**

3 Enter the DVR's **user name** (default: **admin**)

4 Enter the DVR's **password** (default: **000000**)

5 Enter the **Client Port** (default: **9000**)

d Click **Login**. If this is the first time connecting to your system, you will be prompted to change the password. Enter a new 6 character password and click **OK**.

e Enter the new password in the login screen and click **Login** to connect to the DVR. The Client Software connects to your DVR and streams live video from your cameras.

Congratulations! You can now connect over the Internet to view and playback video on your PC.

OR

Mac Users


a Visit lorex.ca/LH030 and download the **Client Software for Mac**.

b Extract the installer file and double-click it to install.

c Open Safari, then click **Safari → Quit Safari**. This resets Safari to complete the installation.

d Open the **Lorex Stratus Client 1**  from the Applications list.

e Enter the following information:

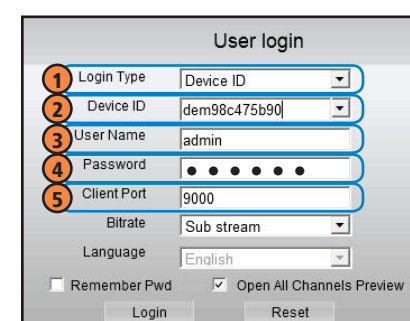

User login

1	Login Type	Device ID
2	Device ID	dem98c475b90
3	User Name	admin
4	Password	•••••
5	Client Port	9000
Bitrate		Sub stream
Language		English
☐ Remember Pwd		☒ Open All Channels Preview
Login		Reset

1 Select **Device ID**

2 Enter the **DVR's Device ID**

3 Enter the DVR's **user name** (default: **admin**)

4 Enter the DVR's **password** (default: **000000**)

5 Enter the **Client Port** (default: **9000**)

g Click **Login**. If this is the first time connecting to your system, you will be prompted to change the password. Enter a new 6 character password and click **OK**.

h Enter the new password in the login screen and click **Login** to connect to the DVR.

Congratulations! You can now connect over the Internet to view and playback video on your Mac computer.

Quick Reference

Default access information:

- Default user name: **admin**
- Default password: **000000**

See the label on top of your DVR for your Device ID.

Default system ports:

- HTTP Port: **80**
- Client Port: **9000**

If you have forgotten your password, contact Lorex technical support.

Need Help?

Visit www.lorextechnology.com/support

It's all on the Web

Scan the QR code or visit the address below to access the latest software and instruction manuals.



lorex.ca/LH030

Information in this document is subject to change without notice. As our products are subject to continuous improvement, Lorex Corporation and our subsidiaries reserve the right to modify product design, specifications and prices, without notice and without incurring any obligation. E&OE © 2014 LOREX. All rights reserved.

LH030 Blackbox3 Series Quick Network Guide - English - R2